

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

7341

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)

09/831783

INTERNATIONAL APPLICATION NO.
PCT/US99/27201INTERNATIONAL FILING DATE
16 November 1999PRIORITY DATE CLAIMED
16 November 1998

TITLE OF INVENTION

Ultrasonic Cleaning Device

APPLICANT(S) FOR DO/EO/US

MCKENZIE, Kristen Lynne et al.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information.

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(I).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application was filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☒ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☒ A change of power of attorney and/or address letter.
16. ☐ Other items or information:

"Express Mail" mailing label number


Date of Deposit

I hereby certify that this paper/fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to The Assistant Commissioner of Patents, Washington, D C 20231

Administrator Mailing Application.

Signature

EL 48362029725
14 May 2001
Virginia C. Byrd

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)		INTERNATIONAL APPLICATION NO.		ATTORNEY'S DOCKET NUMBER	
09/831783		PCT/US99/27201		7341	
				CALCULATIONS PTO USE ONLY	
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$710	
Surcharge of \$130.00 for furnishing the oath or declaration later than [] 20 [] 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$0	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total Claims	28-20 =	8	x \$18.00	\$144	
Independent Claims	5-3 =	2	x \$80.00	\$160	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			\$270.00	\$0	
TOTAL OF ABOVE CALCULATIONS =				\$1014	
Processing fee of \$130.00 for furnishing the English translation later than [] 20 [] 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$0	
TOTAL NATIONAL FEE =				\$1014	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28,3.31). \$40.00 per property +				\$0	
TOTAL FEES ENCLOSED =				\$1014	
				Amount to be refunded	s
				charged	s
<p>a. [] A check in the amount of \$ ____ to cover the above fees is enclosed.</p> <p>b. [x] Please charge my Deposit Account No. <u>16-2480</u> in the amount of \$ <u>1014</u> to cover the above fees. A duplicate copy of this sheet is enclosed.</p> <p>c. [x] The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>16-2480</u>. A duplicate copy of this sheet is enclosed.</p> <p>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</p> <p>SEND ALL CORRESPONDENCE TO:</p>					
J. Taffy, Attorney Customer Number 27748			 Signature T. David Reed Name 32,931 Registration Number		

FILED: 2001 MAY 04

Case 7341

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In the matter of :
U.S. National Phase Entry :
Under 35 USC 371 from :
the International Application of :
MCKENZIE, Kristen Lynne et al. :
Int'l Application No. PCT/US99/27201 :
Filed in the RO/US on 16 November 1999 :
Entitled: Ultrasonic Cleaning Device :

PRELIMINARY AMENDMENT

Commissioner for Patents
Box PCT
Washington, D.C. 20231

Dear Sir:

Before computing the fees for entering the captioned International Application into the U.S. National Phase, please enter the following amendments **IN THE CLAIMS**:

Please cancel claims 1-32.

Please insert new Claims 33-60.

33. (New) A hand held ultrasonic cleaning device comprising a housing, said housing comprising a gripping means; a cleaning head adapted to rest on and be moved over surface to be cleaned, wherein said cleaning head is adapted to be removably mounted to said housing and the minimum surface area of said cleaning head to rest on said surface is greater than about 6.25 cm²; a transducer means mounted in said housing for oscillating said cleaning head at an ultrasonic frequency; and a power supply means for supplying direct current to said transducer means, wherein said power supply means is associated with said device.
34. (New) A hand held ultrasonic cleaning device according to Claim 33 wherein said gripping means is at a proximal end of said housing and said cleaning head is at a distal end of said housing.

35. (New) A hand held ultrasonic cleaning device according to Claim 33 wherein said power supply means is mounted in said housing.
36. (New) A hand held ultrasonic cleaning device according to Claim 33 wherein said device further comprises at least one solution storage means associated with said device, and said solution storage means contains at least one cleaning composition suitable for cleaning said surface; and at least one dispensing means mounted in said housing for supplying said at least one cleaning composition from said at least one solution storage means to said surface prior to or at the same time as said surface is contacted by said cleaning head.
37. (New) A hand held ultrasonic cleaning device according to Claim 36 wherein said cleaning composition comprises a cleaning adjunct selected from the group consisting of anionic surfactants, nonionic surfactants, cationic surfactants, zwitterionic surfactants, amphoteric surfactants, builders, enzymes, bleach activators, bleach catalysts, bleach boosters, bleaches, alkalinity sources, colorants, perfume, lime soap dispersants, polymeric dye transfer inhibiting agents, crystal growth inhibitors, photobleaches, heavy metal ion sequestrants, anti-tarnishing agents, anti-microbial agents, anti-oxidants, anti-redeposition agents, soil release polymers, electrolytes, pH modifiers, thickeners, abrasives, metal ion salts, enzyme stabilizers, corrosion inhibitors, diamines, suds stabilizing polymers, solvents, process aids, antibacterial agent, fabric softening agents, optical brighteners, hydrotropes, and mixtures thereof.
38. (New) A hand held ultrasonic cleaning device according to Claim 36 wherein said cleaning composition is supplied to said surface coterminous with said cleaning head.
39. (New) A hand held ultrasonic cleaning device according to Claim 33 wherein said cleaning head is in the form of a sponge, scouring pad, or bristles.

40. (New) A hand held ultrasonic cleaning device according to Claim 33 wherein said transducer means has an average oscillating frequency of from about 1000 Hz to about 100 kHz.
41. (New) A hand held ultrasonic cleaning device according to Claim 33 wherein said device provides a power output per unit of surface area of said cleaning head of at least about 0.02 watts/cm².
42. (New) A hand held ultrasonic cleaning device according to Claim 33 wherein said device is adapted to function while at least partially immersed in an aqueous environment.
43. (New) An ultrasonic cleaning device comprising a first housing, said first housing comprising a gripping means; a cleaning head adapted to rest on and be moved over surface to be cleaned, and said cleaning head is adapted to be removably mounted to said first housing and the minimum surface area of said cleaning head to rest on said surface is greater than about 6.25 cm²; a second housing, wherein said first housing is associated with said second housing and said second housing comprises a transducer means mounted in said second housing for oscillating said cleaning head at an ultrasonic frequency; and a power supply means for supplying direct current to said transducer means, wherein said power supply means is associated with said device.
44. (New) A hand held ultrasonic cleaning device according to Claim 43 wherein said gripping means is at the proximal end of said first housing and said cleaning head is at the distal end of said first housing.
45. (New) An ultrasonic cleaning device according to Claim 43 wherein said power supply means is mounted in said second housing.
46. (New) An ultrasonic cleaning device according to Claim 43 wherein said device further comprises at least one solution storage means associated with said device, and said at least one solution storage means contains at least one cleaning

composition suitable for cleaning said surface; and at least one dispensing means mounted in said first housing for supplying said at least one cleaning composition from said at least one solution storage means to said surface prior to at the same time as said surface is contacted by said cleaning head.

47. (New) A method of removing tough food soil from a hard surface comprising the steps of:
 - i. contacting said soil with a cleaning composition;
 - ii. contacting said soil with said cleaning head of said device according to Claim 33 and imparting ultrasonic energy to said soil.
48. (New) A method of removing tough food soil according to claim 47 further comprising the step of:
 - iii. rinsing said hard surface with an aqueous solution.
49. (New) A method of removing tough food soil from a hard surface comprising the steps of:
 - i. contacting said soil with a cleaning composition;
 - ii. contacting said soil with said cleaning head of said device according to Claim 43 and imparting ultrasonic energy to said soil.
50. (New) A method of removing tough food soil according to claim 49 further comprising the step of:
 - iii. rinsing said hard surface with an aqueous solution.
51. (New) An ultrasonic cleaning product comprising:
 - a. a cleaning composition comprising a cleaning agent; and
 - b. a hand held ultrasonic cleaning device comprising a housing, said housing comprising a gripping means; a cleaning head adapted to rest on and be moved over surface to be cleaned, wherein said cleaning head is adapted to be removably mounted to said housing and the minimum surface area of said cleaning head to rest on said surface is greater than about 6.25 cm²; a transducer means mounted in said housing for oscillating said cleaning

head at an ultrasonic frequency; and a power supply means for supplying direct current to said transducer means, wherein said power supply means is associated with said device.

52. (New) The ultrasonic cleaning product of claim 51 wherein said cleaning agent is selected from the group consisting of builders, surfactants, enzymes, bleach activators, bleach catalysts, bleach boosters, bleaches, alkalinity sources, colorants, perfume, lime soap dispersants, polymeric dye transfer inhibiting agents, crystal growth inhibitors, photobleaches, heavy metal ion sequestrants, anti-tarnishing agents, anti-microbial agents, antibacterial agent, anti-oxidants, anti-redeposition agents, soil release polymers, electrolytes, pH modifiers, thickeners, abrasives, metal ion salts, enzyme stabilizers, corrosion inhibitors, diamines, suds stabilizing polymers, solvents, process aids, fabric softening agents, optical brighteners, hydrotropes, and mixtures thereof.
53. (New) The ultrasonic cleaning product of claim 51 further comprising instructions for using said product comprising the steps of:
 - i. applying an effective amount of said cleaning composition to said surface; and
 - ii. imparting ultrasonic waves to said surface using said device.
54. (New) The ultrasonic cleaning product of claim 51 further comprising instructions for using said product comprising the steps of:
 - i. using said device to apply an effective amount of said cleaning composition to said surface concurrently and coterminous with said cleaning head; and
 - ii. moving said cleaning head over and maintain contact thereto said surface.
55. (New) An ultrasonic cleaning product comprising:
 - a. a cleaning composition comprising a cleaning agent; and
 - b. an ultrasonic cleaning device comprising a first housing, said first housing comprising a gripping means; a cleaning head adapted to rest on and be moved over surface to be cleaned, and said cleaning head is adapted to be removably mounted to said first housing and the minimum surface area of

said cleaning head to rest on said surface is greater than about 6.25 cm²; a second housing, wherein said first housing is associated with said second housing and said second housing comprises a transducer means mounted in said second housing for oscillating said cleaning head at an ultrasonic frequency; and a power supply means for supplying direct current to said transducer means, wherein said power supply means is associated with said device.


56. (New) The ultrasonic cleaning product of claim 55 wherein said cleaning agent is selected from the group consisting of builders, surfactants, enzymes, bleach activators, bleach catalysts, bleach boosters, bleaches, alkalinity sources, colorants, perfume, lime soap dispersants, polymeric dye transfer inhibiting agents, crystal growth inhibitors, antibacterial agent, photobleaches, heavy metal ion sequestrants, anti-tarnishing agents, anti-microbial agents, anti-oxidants, anti-redeposition agents, soil release polymers, electrolytes, pH modifiers, thickeners, abrasives, metal ion salts, enzyme stabilizers, corrosion inhibitors, diamines, suds stabilizing polymers, solvents, process aids, fabric softening agents, optical brighteners, hydrotropes. and mixtures thereof.
57. (New) The ultrasonic cleaning product of claim 55 further comprising instructions for using said product comprising the steps of:
 - i. applying an effective amount of said cleaning composition to said surface; and
 - ii. imparting ultrasonic waves to said surface using said device.
58. (New) The ultrasonic cleaning product of claim 55 further comprising instructions for using said product comprising the steps of:
 - i. using said device to apply an effective amount of said cleaning composition to said surface concurrently and coterminous with said cleaning head; and
 - ii. moving said cleaning head over and maintain contact thereto said surface.
59. (New) An ultrasonic cleaning device comprising a housing, said housing comprising a gripping means, a retaining means for removably retaining tableware;

a transducer means mounted in said housing for oscillating said housing at an ultrasonic frequency; and a power supply means for supplying direct current to said transducer means, wherein said power supply means is associated with said device.

60. (New) An ultrasonic cleaning device according to Claim 59 wherein said housing is adapted to be at least partially immersed in an aqueous environment.

The support for these amendments is found in the claims as originally filed. These amendments are being entered to bring the claims into conformance with, *inter alia*, 37 CFR §1.75; no new matter is added.

Respectfully submitted for Applicants,

By 
C. Brant Cook
Attorney for Applicants
Registration No. 39,151

May 14, 2001
5299 Spring Grove Avenue
Cincinnati, Ohio 45217-1087
Phone: (513) 627-7025
FAX: (513) 627-6333

09/831781
PCT/PCT No. 14 MAY 2001ULTRASONIC CLEANING DEVICEField of the Invention

The present invention generally relates to devices and processes for removing soils using ultrasonic waves.

Background of the Invention

Ultrasonic cleaning is a well known cleaning process in industry. For example, it is used to clean electronic components after or during immersion in cleaning solution such as azeotropic mixtures of fluorochemicals. It is also used domestically to a small extent in oral hygiene, as in ultrasonic tooth brushes. However, ultrasonic cleaning has not found much acceptance domestically beyond this limited application.

Consequently, the need remains for a device which is able to provide ultrasonic energy or waves of a useful frequency and power, for a variety of cleaning applications.

Background Art

US 4,183,011, US 4,103,519, US 4,225,803, US 3,946,599, US 5,770,801, US 5,640,960, US 3,849,195, US 4,168,560, US 4,250,586, US 5,247,716, US 3,937,326, US 4,069,541, US 4,307,484; JP 10165228, JP 61199829; EP 856,277,

Summary of the Invention

The invention meets the needs identified above by providing a device which is able to provide ultrasonic energy or waves of a useful frequency and power, for a variety of cleaning applications.

The first embodiment of the present invention is an ultrasonic cleaning device comprising a housing, said housing comprising a gripping means; a cleaning head adapted to rest on and be moved over surface to be cleaned, wherein said cleaning head is adapted to be removably mounted to said housing and the minimum surface area of said cleaning head to rest on said surface is greater than about 6.25 cm²; a transducer means mounted in said housing for converting electrical energy to ultrasonic energy said cleaning head at an ultrasonic frequency; and a power supply means for supplying direct current to said transducer means, wherein said power supply means is associated with said device.

The second embodiment of the present invention is an ultrasonic cleaning device comprising a first housing, said first housing comprising a gripping means; a cleaning head adapted to rest on and be moved over surface to be cleaned, and said cleaning head is adapted to be removably mounted to said first housing and the minimum surface area of said cleaning head to rest on said surface is greater than about 6.25 cm^2 ; a second housing, wherein said first housing is associated with said second housing and said second housing comprises a transducer means mounted in said second housing for oscillating said cleaning head at an ultrasonic frequency; and a power supply means for supplying direct current to said transducer means, wherein said power supply means is associated with said device.

The third embodiment of the present invention is an ultrasonic cleaning product comprising:

- (a) a liquid or gel cleaning composition comprising a cleaning agent; and
- (b) a hand held ultrasonic cleaning device comprising a housing, said housing comprising a gripping means; a cleaning head adapted to rest on and be moved over surface to be cleaned, wherein said cleaning head is adapted to be removably mounted to said housing and the minimum surface area of said cleaning head to rest on said surface is greater than about 6.25 cm^2 ; a transducer means mounted in said housing for oscillating said cleaning head at an ultrasonic frequency; and a power supply means for supplying direct current to said transducer means, wherein said power supply means is associated with said device.

The fourth embodiment of the present invention is an ultrasonic cleaning product comprising;

- (a) a liquid or gel cleaning composition comprising a cleaning agent; and
- (b) an ultrasonic cleaning device comprising a first housing, said first housing comprising a gripping means; a cleaning head adapted to rest on and be moved over surface to be cleaned, and said cleaning head is adapted to be removably mounted to said first housing and the minimum surface area of said cleaning head to rest on said surface is greater than about 6.25 cm^2 ; a second housing, wherein said first housing is associated with said second housing and said

second housing comprises a transducer means mounted in said second housing for oscillating said cleaning head at an ultrasonic frequency; and a power supply means for supplying direct current to said transducer means, wherein said power supply means is associated with said device..

The fifth embodiment of the present invention is an ultrasonic cleaning device comprising a housing, said housing comprising optionally a gripping means, a retaining means for removably retaining tableware; a transducer means mounted in said housing for oscillating said housing at an ultrasonic frequency; and a power supply means for supplying direct current to said transducer means, wherein said power supply means is associated with said device.

The sixth embodiment of the present invention is an ultrasonic cleaning device comprising a housing, said housing is adapted to be at least partially immersed in an aqueous environment, and said housing comprises optionally a gripping means, a retaining means for removably retaining tableware; a transducer means mounted in said housing for oscillating said aqueous environment at an ultrasonic frequency; and a power supply means for supplying direct current to said transducer means, wherein said power supply means is associated with said device.

By using this device as a source of ultrasonic energy, stains or tough soils can be removed without the use of excessive force, rubbing, pressure or other manipulation which causes wear and tear on the stained material or surface. In doing so, the user does not need to impart such manual energy to remove the stain, thereby adding to the convenience of the user. The invention also encompasses processes by which such stains or soils are removed, either from localized regions or from the entire article to be cleaned.

The present invention also includes methods of cleaning a hard surface by contacting the surface with a cleaning composition and then contacting the surface with the cleaning head of the device, or the ultrasonic cleaning product, as hereinbefore described and imparting ultrasonic energy to said soil.

The present invention also includes methods removing tough food soil from a hard surface by contacting the soil with a cleaning composition and then contacting the soil

with the cleaning head of the device or the ultrasonic cleaning product, as hereinbefore described and imparting ultrasonic energy to said soil.

As used herein, the phrase "ultrasonic waves" means mechanical pressure or stress waves which can propagate through any material media, wherein the frequency spectra of these waves can vary from a few cycles/second (Hz) to a few billion Hz.

All parts, percentages and ratios used herein are expressed as percent weight unless otherwise specified. All documents cited are, in relevant part, incorporated herein by reference.

BRIEF DESCRIPTION OF THE DRAWING

FIGURE 1 is a perspective view of a hand-held, ultrasonic device, with a cleaning solution storage means which is adapted to be removably mounted in the device. Also shown are a removably mountable cleaning head and an additional cleaning solution storage means.

FIGURE 2 is a perspective view of two different hand-held, pen-shaped ultrasonic devices, which are used in the invention to impart ultrasonic waves onto a stain or soil.

FIGURE 3 is a perspective view of a hand-held, pen-shaped ultrasonic device, which is shown imparting ultrasonic waves onto a soil.

FIGURE 4 is a perspective an ultrasonic device, which are used in the invention to impart ultrasonic waves onto a stain or soil. The ultrasonic generator and the power source are in a second housing which is associated with the cleaning head which is in a first housing.

Detailed Description of the Invention

As it was stated previously, the first embodiment of the present invention is an ultrasonic cleaning device comprising a housing, said housing comprising a gripping means; a cleaning head adapted to rest on and be moved over surface to be cleaned, wherein said cleaning head is adapted to be removably mounted to said housing and the minimum surface area of said cleaning head to rest on said surface is greater than about 6.25 cm², preferably greater than about 20 cm²; preferably said gripping means is at the proximal end of said housing and said cleaning head is at the distal end of said housing; a transducer means mounted in said housing for oscillating said cleaning head at an ultrasonic frequency; and a power supply means for supplying direct current to said

transducer means, wherein said power supply means is associated with said device, preferably said power supply means is mounted in said housing.

It is also preferred that the cleaning device further comprises at least one, more preferably at least two, solution storage means associated with said device, and said solution storage means contains at least one, more preferably at least two, cleaning composition suitable for cleaning said surface; and at least one, more preferably at least two, dispensing means mounted in said housing for supplying said at least one cleaning composition from said at least one solution storage means to said surface prior to or at the same time as said surface is contacted by said cleaning head. In one aspect it is preferred that the solution storage means is adapted to be removably mounted to said housing. In another aspect it is preferred that the solution storage means is mounted in said housing. One advantage of having two or more storage means is that incompatible cleaning ingredients, such as bleach and enzymes, which would ordinarily not be possible to combine in a cleaning composition without the loss of cleaning activity, can be put in different storage means. This allows the compositions to gain the cleaning benefits of these incompatible ingredients as they only come into contact with one another either just before dispensing or when the are applied to the surface. This means that any loss in cleaning potential would be minimized.

As it was stated previously, the second embodiment of the present invention is an ultrasonic cleaning device comprising a first housing, said first housing comprising a gripping means; a cleaning head adapted to rest on and be moved over surface to be cleaned, and said cleaning head is adapted to be removably mounted to said first housing and the minimum surface area of said cleaning head to rest on said surface is greater than about 6.25 cm²; preferably the gripping means is at the proximal end of the first housing and the cleaning head is at the distal end of the first housing; a second housing, wherein said first housing is associated with said second housing and said second housing comprises a transducer means mounted in said second housing for oscillating said cleaning head at an ultrasonic frequency; and a power supply means for supplying direct current to said transducer means, wherein said power supply means is associated with said device, preferably the power supply means is mounted in said second housing.

It is also preferred that the cleaning device according to the second aspect further comprises at least one solution storage means associated with said device, and said at least one, more preferably at least two, solution storage means contains at least one, more preferably at least two, cleaning composition suitable for cleaning said surface; and at least one, more preferably at least two, dispensing means mounted in said first housing for supplying said at least one cleaning composition from said at least one solution storage means to said surface prior to or at the same time as said surface is contacted by said cleaning head. In one aspect it is preferred that the solution storage means is adapted to be removably mounted to said first housing. In one aspect it is preferred that the solution storage means is adapted to be removably mounted to the second housing. In another aspect it is preferred that the solution storage means is mounted in the first housing. In another aspect it is preferred that the solution storage means is mounted in the second housing. This use of more than one solution storage means has all the advantages of using incompatible ingredients as was noted previously above.

In the second aspect it is preferred that the first housing be capable of being hand held. In one preferred form the first housing is stored in the second housing while not in use. While in use the first housing is used to clean the surface while the second housing stores and supplies the cleaning composition(s), power and ultrasonic energy to the first housing to clean the surface.

As it was stated previously, the third and fourth embodiments of the present invention are ultrasonic cleaning products comprising a liquid cleaning composition comprising a cleaning agent; and the hand held ultrasonic cleaning device according to the first aspect or the ultrasonic cleaning device according to the second aspect.

Preferably the cleaning agent is present in the liquid cleaning composition in an effective amount, more preferably from about 0.0001% to about 99.9%, even more preferably from about 0.001% to about 55%, even more preferably still from about 0.005% to about 45% by weight. These cleaning compositions can comprise additional cleaning additives and these are exemplified in greater detail hereafter. The liquid cleaning composition in the ultrasonic cleaning products can be, for example, in the optional at least one solution storage means, in another container in the same product and designed to be added to the optional at least one solution storage, in another container in

the same product and directly added to the surface to be cleaned, in another container in the same product and made into an aqueous solution in which the surface is immersed, in another container in the same product and applied to by the user from another container to the cleaning head either neat or in another container in the same product and as an aqueous solution. These are merely some possible examples and not intended to be limiting.

It is preferred that these ultrasonic cleaning products further comprise instructions for using the product. One preferred set of instructions comprises the steps of

- (i) applying an effective amount of said liquid cleaning composition to said surface;
- (ii) imparting ultrasonic waves to said surface using said device; and
- (iii) optionally, rinsing the surface with an aqueous solution.

Another, preferred set of instructions comprises the steps of:

- (i) using said device to apply an effective amount of said liquid cleaning composition to said surface concurrently and coterminous with said cleaning head;
- (ii) moving said cleaning head over and maintain contact thereto said surface and
- (iii) optionally, rinsing the surface with an aqueous solution.

These instructions are suitable for incorporation with ultrasonic cleaning products based on either the device of the first or second embodiment.

As it was stated previously, the fifth embodiment of the present invention is an ultrasonic cleaning device comprising a housing, said housing comprising an optional gripping means, a retaining means for removably retaining tableware; a transducer means mounted in said housing for oscillating said housing at an ultrasonic frequency; and a power supply means for supplying direct current to said transducer means, wherein said power supply means is associated with said device.

As it was stated previously, the sixth embodiment of the present invention is an ultrasonic cleaning device comprising a housing, said housing is adapted to be at least partially immersed in an aqueous environment, and said housing comprises an optional gripping means, a retaining means for removably retaining tableware; a transducer means mounted in said housing for oscillating said aqueous environment at an ultrasonic

frequency; and a power supply means for supplying direct current to said transducer means, wherein said power supply means is associated with said device.

For the ultrasonic devices the power source can be any conventional power source, such as mains power, rechargeable batteries, disposable batteries, with rechargeable battery or rechargeable batteries being preferred.

It is preferred that the surface contacted by the cleaning head is a hard surface. A "hard surface" is any surface which is traditionally regarded as hard, that is tableware, such as plates, glasses, cutlery, pots and pans, and also includes other surfaces such as kitchen counter tops, sinks, glass, windows, enamel surfaces, metal surfaces, tiles, bathtubs, floors etc. More preferably, the hard surface is tableware.

The cleaning composition can comprise conventional cleaning additives and these are exemplified in greater detail hereafter. The cleaning composition can be dispensed from the storage means automatically, or when desired by the device user. The cleaning composition can be dispensed from the storage means into the cleaning head and applied by the cleaning head directly to the surface. Alternatively, the cleaning composition can be dispensed on to the surface which is not currently in contact with the cleaning head. Such as in front of, to either side or behind the direction the cleaning head is being moved over the surface. It is preferred that cleaning composition is supplied to the surface coterminous with the cleaning head. Furthermore, when the device does not contain storage means the cleaning composition can be either applied by the operator on to the surface, the stain/soil in need of cleaning or directly on to the cleaning head. The cleaning composition can be used neat or as an aqueous solution.

The cleaning head can be of any form suitable for cleaning. For example the cleaning head could be a sponge, steel wool, scouring pad, foam, or bristles. However, it is critical, no matter what the cleaning head be, that the surface area be greater than about 6.25 cm². The cleaning head is adapted to be removably mounted, this is for ease of replacement, changing head type depending on the surface and/or soil to be cleaned/removed, and for overall efficiency and flexibility of use.

The transducer means oscillates at a frequency of from about 100 Hz to about 20,000 kHz, more preferably from about 100 Hz to about 10,000 kHz, more preferably from about 150 Hz to about 2000 kHz, more preferably from about 150 Hz to about

1,000 kHz, more preferably from about 150 Hz to about 100 kHz, more preferably from about 200 Hz to about 50 kHz. It is preferred that the average frequency be from about 1000 Hz to about 100kHz, more preferably from about 10,000 Hz to about 70kHz. It is also preferred that the device provides a power output per unit of surface area of said cleaning head of at least about 0.02 watts/cm², more preferably at least about 0.05 watts/cm², even more preferably at least about 0.07 watts/cm², even more preferably still at least about 0.08 watts/cm².

While it is not essential, it is preferred that the device is adapted to function while partially immersed in an aqueous environment, more preferably the device is adapted to function while totally immersed in an aqueous environment. Alternatively, it is preferred that the device is water resistant, more preferably water proof. That is, when the device is made for cleaning in aqueous environment, such as washing dishes, pots etc., the device can be either partially or totally immersed without damage to the device or harm to the user. While devices that would be only used for cleaning hard surfaces, such as floor or tables, would not need to be adapted to function while partially immersed in an aqueous environment, more preferably the device is adapted to function while totally immersed in an aqueous environment, it is highly preferred that the devices at least be adapted to function while partially immersed in an aqueous environment.

The present invention also includes a method of removing tough food soil from a hard surface comprising the steps of:

- (i) contacting said soil with a cleaning composition;
- (ii) contacting said soil with said cleaning head of said device according to either the first or second aspect and imparting ultrasonic energy to said soil; and
- (iii) optionally, rinsing said hard surface with an aqueous solution.

Alternatively, step (ii) could be performed first, then (i), with the possibility of repeating this order until the soil is removed, or steps(ii), (i) and (iii) in this order. Steps (i) and (ii) could be performed at the same time and optionally followed by step (iii). Another method that is within the scope of the present invention is one where the soil is softened by application of a cleaning composition and the softened soil is removed by the application of ultrasonic energy to the softened soil.

Cleaning Composition:

The cleaning composition contains cleaning additives. This composition can be in any conventional form, such as liquid, gel paste, etc. The compositions may additionally contain aqueous solvents such as water or low molecular weight alcohols, such as methanol, or ethanol.

Cleaning additives

The cleaning composition comprises cleaning additives. These cleaning additives are for assisting or enhancing cleaning performance, treatment of the substrate to be cleaned, or to modify the aesthetics of the detergent composition (e.g., perfumes, colorants, dyes, etc.). Some suitable cleaning additives include of builders, surfactants, enzymes, bleach activators, bleach catalysts, bleach boosters, bleaches, alkalinity sources, antibacterial agent, colorants, perfume, lime soap dispersants, polymeric dye transfer inhibiting agents, crystal growth inhibitors, photobleaches, heavy metal ion sequestrants, anti-tarnishing agents, anti-microbial agents, anti-oxidants, anti-redeposition agents, soil release polymers, electrolytes, pH modifiers, thickeners, abrasives, divalent ions, metal ion salts, enzyme stabilizers, corrosion inhibitors, diamines, suds stabilizing polymers, solvents, process aids, fabric softening agents, optical brighteners, hydrotropes. and mixtures thereof. The following are illustrative examples of such adjunct materials.

Detergent Builders

The present invention may include an optional builder in the product composition. The level of detergent salt/builder can vary widely depending upon the end use of the composition and its desired physical form. When present, the compositions will typically comprise at least about 1% detergent builder and more typically from about 10% to about 80%, even more typically from about 15% to about 50% by weight, of the detergent builder. Lower or higher levels, however, are not meant to be excluded.


Inorganic or P-containing detergent builders include, but are not limited to, the alkali metal, ammonium and alkanolammonium salts of polyphosphates (exemplified by the tripolyphosphates, pyrophosphates, and glassy polymeric meta-phosphates), phosphonates, phytic acid, silicates, carbonates (including bicarbonates and sesquicarbonates), sulphates, and aluminosilicates. However, non-phosphate salts are required in some locales. Importantly, the compositions herein function surprisingly well even in the presence of the so-called "weak" builders (as compared with phosphates)

such as citrate, or in the so-called "underbuilt" situation that may occur with zeolite or layered silicate builders. Mixture of builders are also envisaged.

Examples of silicate builders are the alkali metal silicates, particularly those having a $\text{SiO}_2\text{:Na}_2\text{O}$ ratio in the range 1.6:1 to 3.2:1 and layered silicates, such as the layered sodium silicates described in U.S. Patent 4,664,839, issued May 12, 1987 to H. P. Rieck. NaSKS-6 is the trademark for a crystalline layered silicate marketed by Hoechst (commonly abbreviated herein as "SKS-6"). Unlike zeolite builders, the Na SKS-6 silicate builder does not contain aluminum. NaSKS-6 has the delta- Na_2SiO_5 morphology form of layered silicate. It can be prepared by methods such as those described in German DE-A-3,417,649 and DE-A-3,742,043. SKS-6 is a highly preferred layered silicate for use herein, but other such layered silicates, such as those having the general formula $\text{NaMSi}_x\text{O}_{2x+1}\cdot y\text{H}_2\text{O}$ wherein M is sodium or hydrogen, x is a number from 1.9 to 4, preferably 2, and y is a number from 0 to 20, preferably 0 can be used herein. Various other layered silicates from Hoechst include NaSKS-5, NaSKS-7 and NaSKS-11, as the alpha, beta and gamma forms. As noted above, the delta- Na_2SiO_5 (NaSKS-6 form) is most preferred for use herein. Other silicates may also be useful such as for example magnesium silicate, which can serve as a crispening agent in granular formulations, as a stabilizing agent for oxygen bleaches, and as a component of suds control systems.

Examples of carbonate salts as builders are the alkaline earth and alkali metal carbonates as disclosed in German Patent Application No. 2,321,001 published on November 15, 1973.


Aluminosilicate builders may also be added to the present invention as a detergent salt. Aluminosilicate builders are of great importance in most currently marketed heavy duty granular detergent compositions. Aluminosilicate builders include those having the empirical formula:



wherein z and y are integers of at least 6, the molar ratio of z to y is in the range from 1.0 to about 0.5, and x is an integer from about 15 to about 264.

Useful aluminosilicate ion exchange materials are commercially available. These aluminosilicates can be crystalline or amorphous in structure and can be naturally-

occurring aluminosilicates or synthetically derived. A method for producing aluminosilicate ion exchange materials is disclosed in U.S. Patent 3,985,669, Krummel, et al, issued October 12, 1976. Preferred synthetic crystalline aluminosilicate ion exchange materials useful herein are available under the designations Zeolite A, Zeolite P (B), Zeolite MAP and Zeolite X. In an especially preferred embodiment, the crystalline aluminosilicate ion exchange material has the formula:



wherein x is from about 20 to about 30, especially about 27. This material is known as Zeolite A. Dehydrated zeolites (x = 0 - 10) may also be used herein. Preferably, the aluminosilicate has a particle size of about 0.1-10 microns in diameter.

Organic detergent builders suitable for the purposes of the present invention include, but are not restricted to, a wide variety of polycarboxylate compounds. As used herein, "polycarboxylate" refers to compounds having a plurality of carboxylate groups, preferably at least 3 carboxylates. Polycarboxylate builder can generally be added to the composition in acid form, but can also be added in the form of a neutralized salt. When utilized in salt form, alkali metals, such as sodium, potassium, and lithium, or alkanolammonium salts are preferred.

Included among the polycarboxylate builders are a variety of categories of useful materials. One important category of polycarboxylate builders encompasses the ether polycarboxylates, including oxydisuccinate, as disclosed in Berg, U.S. Patent 3,128,287, issued April 7, 1964, and Lamberti et al, U.S. Patent 3,635,830, issued January 18, 1972. See also "TMS/TDS" builders of U.S. Patent 4,663,071, issued to Bush et al, on May 5, 1987. Suitable ether polycarboxylates also include cyclic compounds, particularly alicyclic compounds, such as those described in U.S. Patents 3,923,679; 3,835,163; 4,158,635; 4,120,874 and 4,102,903.

Other useful detergency builders include the ether hydroxypolycarboxylates, copolymers of maleic anhydride with ethylene or vinyl methyl ether, 1, 3, 5-trihydroxy benzene-2, 4, 6-trisulphonic acid, and carboxymethyloxysuccinic acid, the various alkali metal, ammonium and substituted ammonium salts of polyacetic acids such as ethylenediamine tetraacetic acid and nitrilotriacetic acid, as well as polycarboxylates such

as mellitic acid, succinic acid, oxydisuccinic acid, polymaleic acid, benzene 1,3,5-tricarboxylic acid, carboxymethyloxysuccinic acid, and soluble salts thereof.

Citrate builders, e.g., citric acid and soluble salts thereof (particularly sodium salt), are polycarboxylate builders of particular importance. Oxydisuccinates are also especially useful in such compositions and combinations.

Also suitable in the detergent compositions of the present invention are the 3,3-dicarboxy-4-oxa-1,6-hexanedioates and the related compounds disclosed in U.S. Patent 4,566,984, Bush, issued January 28, 1986. Useful succinic acid builders include the C5-C20 alkyl and alkenyl succinic acids and salts thereof. A particularly preferred compound of this type is dodecenylsuccinic acid. Specific examples of succinate builders include: laurylsuccinate, myristylsuccinate, palmitylsuccinate, 2-dodecenylsuccinate (preferred), 2-pentadecenylsuccinate, and the like. Laurylsuccinates are the preferred builders of this group, and are described in European Patent Application 86200690.5/0,200,263, published November 5, 1986.

Other suitable polycarboxylates are disclosed in U.S. Patent 4,144,226, Crutchfield et al, issued March 13, 1979 and in U.S. Patent 3,308,067, Diehl, issued March 7, 1967. See also Diehl U.S. Patent 3,723,322.

Fatty acids, e.g., C12-C18 monocarboxylic acids, can also be incorporated into the compositions alone, or in combination with the aforesaid builders, especially citrate and/or the succinate builders, to provide additional builder activity. Such use of fatty acids will generally result in a diminution of sudsing, which should be taken into account by the formulator.

Surfactants

Surfactants may be included in the compositions of the present invention as ultrasonic cleaning agent. The surfactant may comprise from about 0.01%, to about 99.9%, by weight of the composition depending upon the particular surfactants used and the effects desired. More typical levels comprise from about 0.1% to about 80%, even more preferably from about 0.5% to about 60%, by weight of the composition. Examples of suitable surfactants can be found in McCutcheon's EMULSIFIERS AND DETERGENTS, North American Edition, 1997, McCutcheon Division, MC Publishing Company, in U.S. 3,929,678, Dec. 30, 1975 Laughlin, et al, and U.S. 4,259,217, March

31, 1981, Murphy; in the series "Surfactant Science", Marcel Dekker, Inc., New York and Basel; in "Handbook of Surfactants", M.R. Porter, Chapman and Hall, 2nd Ed., 1994; in "Surfactants in Consumer Products", Ed. J. Falbe, Springer-Verlag, 1987 and "Surface Active Agents and Detergents" (Vol. I and II by Schwartz, Perry and Berch) all of which are incorporated hereinbefore by reference.

The deterative surfactant can be nonionic, anionic, ampholytic, zwitterionic, or cationic. Mixtures of these surfactants can also be used. Preferred detergent compositions comprise anionic deterative surfactants or mixtures of anionic surfactants with other surfactants, especially nonionic surfactants and/or amphoteric surfactants.

Nonlimiting examples of surfactants useful herein include the conventional C11-C18 alkyl benzene sulfonates and primary, secondary and random alkyl sulfates, the C10-C18 alkyl alkoxy sulfates, the C10-C18 alkyl polyglycosides and their corresponding sulfated polyglycosides, C12-C18 alpha-sulfonated fatty acid esters, C12-C18 alkyl and alkyl phenol alkoxylates (especially ethoxylates and mixed ethoxy/propoxy), C12-C18 betaines and sulfobetaines ("sultaines"), C10-C18 amine oxides, C₆ to C₁₈ branched or linear alkyl sulfates, C₆ to C₁₈ branched or linear alkyl benzene sulfonates, C₆ to C₁₈ branched or linear alkyl alkoxy sulfates, and mixtures thereof. and the like. Other conventional useful surfactants are listed in standard texts.

Anionic Surfactants -

The anionic surfactants useful in the present invention are preferably selected from the group consisting of, linear alkylbenzene sulfonate, alpha olefin sulfonate, paraffin sulfonates, alkyl ester sulfonates, alkyl sulfates, alkyl alkoxy sulfate, alkyl sulfonates, alkyl alkoxy carboxylate, alkyl alkoxylated sulfates, sarcosinates, taurinates, and mixtures thereof, more preferably C₆ to C₁₈ branched or linear alkyl sulfates, C₆ to C₁₈ branched or linear alkyl benzene sulfonates, C₆ to C₁₈ branched or linear alkyl alkoxy sulfates, and mixtures thereof. An effective amount, typically from about 0.5% to about 90%, preferably about 5% to about 60%, more preferably from about 10 to about 30%, by weight of anionic deterative surfactant can be used in the present invention.

Alkyl sulfate surfactants are another type of anionic surfactant of importance for use herein. In addition to providing excellent overall cleaning ability when used in combination with polyhydroxy fatty acid amides (see below), including good grease/oil

cleaning over a wide range of temperatures, wash concentrations, and wash times, dissolution of alkyl sulfates can be obtained, as well as improved formulability in liquid detergent formulations are water soluble salts or acids of the formula ROSO_3M wherein R preferably is a $\text{C}_{10}\text{-C}_{24}$ hydrocarbonyl, preferably an alkyl or hydroxyalkyl having a $\text{C}_{10}\text{-C}_{20}$ alkyl component, more preferably a $\text{C}_{12}\text{-C}_{18}$ alkyl or hydroxyalkyl, and M is H or a cation, e.g., an alkali (Group IA) metal cation (e.g., sodium, potassium, lithium), substituted or unsubstituted ammonium cations such as methyl-, dimethyl-, and trimethyl ammonium and quaternary ammonium cations, e.g., tetramethyl-ammonium and dimethyl piperdinium, and cations derived from alkanolamines such as ethanolamine, diethanolamine, triethanolamine, and mixtures thereof, and the like. Typically, alkyl chains of $\text{C}_{12}\text{-C}_{16}$ are preferred for lower wash temperatures (e.g., below about 50°C) and $\text{C}_{16}\text{-C}_{18}$ alkyl chains are preferred for higher wash temperatures (e.g., above about 50°C).

Alkyl alkoxyated sulfate surfactants are another category of useful anionic surfactant. These surfactants are water soluble salts or acids typically of the formula $\text{RO(A)}_m\text{SO}_3\text{M}$ wherein R is an unsubstituted $\text{C}_{10}\text{-C}_{24}$ alkyl or hydroxyalkyl group having a $\text{C}_{10}\text{-C}_{24}$ alkyl component, preferably a $\text{C}_{12}\text{-C}_{20}$ alkyl or hydroxyalkyl, more preferably $\text{C}_{12}\text{-C}_{18}$ alkyl or hydroxyalkyl, A is an ethoxy or propoxy unit, m is greater than zero, typically between about 0.5 and about 6, more preferably between about 0.5 and about 3, and M is H or a cation which can be, for example, a metal cation (e.g., sodium, potassium, lithium, etc.), ammonium or substituted-ammonium cation. Alkyl ethoxylated sulfates as well as alkyl propoxylated sulfates are contemplated herein. Specific examples of substituted ammonium cations include methyl-, dimethyl-, trimethyl-ammonium and quaternary ammonium cations, such as tetramethyl-ammonium, dimethyl piperidinium and cations derived from alkanolamines, e.g. monoethanolamine, diethanolamine, and triethanolamine, and mixtures thereof. Exemplary surfactants are $\text{C}_{12}\text{-C}_{18}$ alkyl polyethoxylate (1.0) sulfate, $\text{C}_{12}\text{-C}_{18}$ alkyl polyethoxylate (2.25) sulfate, $\text{C}_{12}\text{-C}_{18}$ alkyl polyethoxylate (3.0) sulfate, and $\text{C}_{12}\text{-C}_{18}$ alkyl polyethoxylate (4.0) sulfate wherein M is conveniently selected from sodium and potassium. Surfactants for use herein can be made from natural or synthetic alcohol

feedstocks. Chain lengths represent average hydrocarbon distributions, including branching.

Examples of suitable anionic surfactants are given in "Surface Active Agents and Detergents" (Vol. I and II by Schwartz, Perry and Berch). A variety of such surfactants are also generally disclosed in U.S. Patent 3,929,678, issued December 30, 1975 to Laughlin, et al. at Column 23, line 58 through Column 29, line 23.

Another possible surfactant are the so-called Dianionics. These are surfactants which have at least two anionic groups present on the surfactant molecule. Some suitable dianionic surfactants are further described in copending U.S. Serial No. 60/020,503 (Docket No. 6160P), 60/020,772 (Docket No. 6161P), 60/020,928 (Docket No. 6158P), 60/020,832 (Docket No. 6159P) and 60/020,773 (Docket No. 6162P) all filed on June 28, 1996, and 60/023,539 (Docket No. 6192P), 60/023,493 (Docket No. 6194P), 60/023,540 (Docket No. 6193P) and 60/023,527 (Docket No. 6195P) filed on August 8th, 1996, the disclosures of which are incorporated herein by reference. Other conventional useful surfactants are listed in standard texts.

Nonionic Surfactants - One particularly preferred surfactants are nonionic surfactants. Nonionic surfactants may be present in amounts from 0.01% to about 40% by weight, preferably from about 0.1% to about 30%, and most preferably from about 0.25% to about 20%.

Particularly preferred in the present invention include mixed nonionic surfactants. While a wide range of nonionic surfactants may be selected from for purposes of the mixed nonionic surfactant systems useful in the present invention compositions, it is preferred that the nonionic surfactants comprise both a low cloud point surfactant as represented by the ether capped poly(oxyalkylated) alcohol surfactant and high cloud point nonionic surfactant(s) as described as follows. "Cloud point", as used herein, is a well known property of nonionic surfactants which is the result of the surfactant becoming less soluble with increasing temperature, the temperature at which the appearance of a second phase is observable is referred to as the "cloud point" (See Kirk Othmer, pp. 360-362, hereinbefore).

As used herein, a "low cloud point" nonionic surfactant is defined as a nonionic surfactant system ingredient having a cloud point of less than 30°C, preferably less than

about 20°C, and most preferably less than about 10°C and is represented by the ether-capped poly(oxyalkylated) alcohols as described herein.

Of course, other low-cloud point surfactants may be included in conjunction with the ether-capped poly(oxyalkylated) surfactants. Such optional low-cloud point surfactants include nonionic alkoxyated surfactants, especially ethoxylates derived from primary alcohol, and polyoxypropylene/polyoxyethylene/polyoxypropylene (PO/EO/PO) reverse block polymers. Also, such low cloud point nonionic surfactants include, for example, ethoxylated-propoxylated alcohol (e.g., Olin Corporation's Poly-Tergent® SLF18) and epoxy-capped poly(oxyalkylated) alcohols (e.g., Olin Corporation's Poly-Tergent® SLF18B series of nonionics, as described, for example, in WO 94/22800, published October 13, 1994 by Olin Corporation). These nonionic surfactants can optionally contain propylene oxide in an amount up to about 15% by weight. Other preferred nonionic surfactants can be prepared by the processes described in U.S. Patent 4,223,163, issued September 16, 1980, Builloty, incorporated herein by reference.

Optional low cloud point nonionic surfactants additionally comprise a polyoxyethylene, polyoxypropylene block polymeric compound. Block polyoxyethylene-polyoxypropylene polymeric compounds include those based on ethylene glycol, propylene glycol, glycerol, trimethylolpropane and ethylenediamine as initiator reactive hydrogen compound. Certain of the block polymer surfactant compounds designated PLURONIC®, REVERSED PLURONIC®, and TETRONIC® by the BASF-Wyandotte Corp., Wyandotte, Michigan, are suitable in ADD compositions of the invention. Preferred examples include REVERSED PLURONIC® 25R2 and TETRONIC® 702. Such surfactants are typically useful herein as low cloud point nonionic surfactants.

As used herein, a "high cloud point" nonionic surfactant is defined as a nonionic surfactant system ingredient having a cloud point of greater than 40°C, preferably greater than about 50°C, and more preferably greater than about 60°C. Preferably the nonionic surfactant system comprises an ethoxylated surfactant derived from the reaction of a monohydroxy alcohol or alkylphenol containing from about 8 to about 20 carbon atoms, with from about 6 to about 15 moles of ethylene oxide per mole of alcohol or alkyl phenol on an average basis. Such high cloud point nonionic surfactants include, for

example, Tergitol 15S9 (supplied by Union Carbide), Rhodasurf TMD 8.5 (supplied by Rhone Poulenc), and Neodol 91-8 (supplied by Shell).

It is also preferred for purposes of the present invention that the high cloud point nonionic surfactant further have a hydrophile-lipophile balance ("HLB"; see Kirk Othmer hereinbefore) value within the range of from about 9 to about 15, preferably 11 to 15. Such materials include, for example, Tergitol 15S9 (supplied by Union Carbide), Rhodasurf TMD 8.5 (supplied by Rhone Poulenc), and Neodol 91-8 (supplied by Shell).

Another preferred high cloud point nonionic surfactant is derived from a straight or preferably branched chain or secondary fatty alcohol containing from about 6 to about 20 carbon atoms (C6-C20 alcohol), including secondary alcohols and branched chain primary alcohols. Preferably, high cloud point nonionic surfactants are branched or secondary alcohol ethoxylates, more preferably mixed C9/11 or C11/15 branched alcohol ethoxylates, condensed with an average of from about 6 to about 15 moles, preferably from about 6 to about 12 moles, and most preferably from about 6 to about 9 moles of ethylene oxide per mole of alcohol. Preferably the ethoxylated nonionic surfactant so derived has a narrow ethoxylate distribution relative to the average.

The preferred nonionic surfactant systems useful herein are mixed high cloud point and low cloud point nonionic surfactants combined in a weight ratio preferably within the range of from about 10:1 to about 1:10.

Another type of preferred nonionic surfactants are the endcapped alkyl alkoxyate surfactants. Suitable endcapped alkyl alkoxyate surfactant are the epoxy-capped poly(oxyalkylated) alcohols represented by the formula:




wherein R_1 is a linear or branched, aliphatic hydrocarbon radical having from 4 to 18 carbon atoms; R_2 is a linear or branched aliphatic hydrocarbon radical having from 2 to 26 carbon atoms; x is an integer having an average value of from 0.5 to 1.5, more preferably 1; and y is an integer having a value of at least 15, more preferably at least 20.

Preferably, the surfactant of formula I, at least 10 carbon atoms in the terminal epoxide unit $[CH_2CH(OH)R_2]$. Suitable surfactants of formula I, according to the

present invention, are Olin Corporation's POLY-TERGENT® SLF-18B nonionic surfactants, as described, for example, in WO 94/22800, published October 13, 1994 by Olin Corporation.

One preferred ether-capped poly(oxyalkylated) alcohols has the formula:




wherein R^1 and R^2 are linear or branched, saturated or unsaturated, aliphatic or aromatic hydrocarbon radicals having from 1 to 30 carbon atoms; R^3 is H, or a linear aliphatic hydrocarbon radical having from 1 to 4 carbon atoms; x is an integer having an average value from 1 to 30, wherein when x is 2 or greater R^3 may be the same or different and k and j are integers having an average value of from 1 to 12, and more preferably 1 to 5.

R^1 and R^2 are preferably linear or branched, saturated or unsaturated, aliphatic or aromatic hydrocarbon radicals having from 6 to 22 carbon atoms with 8 to 18 carbon atoms being most preferred. H or a linear aliphatic hydrocarbon radical having from 1 to 2 carbon atoms is most preferred for R^3 . Preferably, x is an integer having an average value of from 1 to 20, more preferably from 6 to 15.

As described above, when, in the preferred embodiments, and x is greater than 2, R^3 may be the same or different. That is, R^3 may vary between any of the alkyleneoxy units as described above. For instance, if x is 3, R^3 may be selected to form ethyleneoxy (EO) or propyleneoxy (PO) and may vary in order of (EO)(PO)(EO), (EO)(EO)(PO); (EO)(EO)(EO); (PO)(EO)(PO); (PO)(PO)(EO) and (PO)(PO)(PO). Of course, the integer three is chosen for example only and the variation may be much larger with a higher integer value for x and include, for example, multiple (EO) units and a much small number of (PO) units.

Particularly preferred surfactants as described above include those that have a low cloud point of less than 20°C. These low cloud point surfactants may then be employed in conjunction with a high cloud point surfactant as described in detail below for superior grease cleaning benefits.

Most preferred ether-capped poly(oxyalkylated) alcohol surfactants are those wherein k is 1 and j is 1 so that the surfactants have the formula:




where R^1 , R^2 and R^3 are defined as above and x is an integer with an average value of from 1 to 30, preferably from 1 to 20, and even more preferably from 6 to 18. Most preferred are surfactants wherein R^1 and R^2 range from 9 to 14, R^3 is H forming ethyleneoxy and x ranges from 6 to 15.

The ether-capped poly(oxyalkylated) alcohol surfactants comprise three general components, namely a linear or branched alcohol, an alkylene oxide and an alkyl ether end cap. The alkyl ether end cap and the alcohol serve as a hydrophobic, oil-soluble portion of the molecule while the alkylene oxide group forms the hydrophilic, water-soluble portion of the molecule.

These surfactants exhibit significant improvements in spotting and filming characteristics and removal of greasy soils, especially, when used in conjunction with high cloud point surfactants, relative to conventional surfactants.

Another suitable class of nonionic surfactants comprises sugar derived surfactants such as the polyhydroxy fatty acid amides of the formula:



wherein: R^1 is H, C_1 - C_4 hydrocarbyl, 2-hydroxy ethyl, 2-hydroxy propyl, or a mixture thereof, preferably C_1 - C_4 alkyl, more preferably C_1 or C_2 alkyl, most preferably C_1 alkyl (i.e., methyl); and R^2 is a C_5 - C_{31} hydrocarbyl, preferably straight chain C_7 - C_{19} alkyl or alkenyl, more preferably straight chain C_9 - C_{17} alkyl or alkenyl, most preferably straight chain C_{11} - C_{15} alkyl or alkenyl, or mixtures thereof; and Z is a polyhydroxyhydrocarbyl having a linear hydrocarbyl chain with at least 3 hydroxyls directly connected to the chain, or an alkoxyated derivative (preferably ethoxylated or propoxylated) thereof. Z preferably will be derived from a reducing sugar in a reductive amination reaction; more preferably Z will be a glycityl. Suitable reducing sugars include glucose, fructose, maltose, lactose, galactose, mannose, and xylose. As raw materials, high dextrose corn syrup, high fructose corn syrup, and high maltose corn syrup can be utilized as well as the individual sugars listed above. These corn syrups

may yield a mix of sugar components for Z. It should be understood that it is by no means intended to exclude other suitable raw materials. Z preferably will be selected from the group consisting of $-\text{CH}_2-(\text{CHOH})_n-\text{CH}_2\text{OH}$, $-\text{CH}(\text{CH}_2\text{OH})-(\text{CHOH})_{n-1}-\text{CH}_2\text{OH}$, $-\text{CH}_2-(\text{CHOH})_2(\text{CHOR}')(\text{CHOH})-\text{CH}_2\text{OH}$, and alkoxyated derivatives thereof, where n is an integer from 3 to 5, inclusive, and R' is H or a cyclic or aliphatic monosaccharide. Most preferred are glycityls wherein n is 4, particularly $-\text{CH}_2-(\text{CHOH})_4-\text{CH}_2\text{OH}$.


R' can be, for example, N-methyl, N-ethyl, N-propyl, N-isopropyl, N-butyl, N-2-hydroxy ethyl, or N-2-hydroxy propyl.

$\text{R}^2\text{-CO-N}<$ can be, for example, cocamide, stearamide, oleamide, lauramide, myristamide, capricamide, palmitamide, tallowamide, etc.

Z can be 1-deoxyglucityl, 2-deoxyfructityl, 1-deoxymaltityl, 1-deoxylactityl, 1-deoxygalactityl, 1-deoxymannityl, 1-deoxymaltotriosityl, etc.

Methods for making polyhydroxy fatty acid amides are known in the art. In general, they can be made by reacting an alkyl amine with a reducing sugar in a reductive amination reaction to form a corresponding N-alkyl polyhydroxyamine, and then reacting the N-alkyl polyhydroxyamine with a fatty aliphatic ester or triglyceride in a condensation/amidation step to form the N-alkyl, N-polyhydroxy fatty acid amide product. Processes for making compositions containing polyhydroxy fatty acid amides are disclosed, for example, in G.B. Patent Specification 809,060, published February 18, 1959, by Thomas Hedley & Co., Ltd., U.S. Patent 2,965,576, issued December 20, 1960 to E. R. Wilson, and U.S. Patent 2,703,798, Anthony M. Schwartz, issued March 8, 1955, and U.S. Patent 1,985,424, issued December 25, 1934 to Piggott, each of which is incorporated herein by reference.

The preferred alkylpolyglycosides have the formula




wherein R^2 is selected from the group consisting of alkyl, alkyl-phenyl, hydroxyalkyl, hydroxyalkylphenyl, and mixtures thereof in which the alkyl groups contain from about 10 to about 18, preferably from about 12 to about 14, carbon atoms; n is 2 or 3, preferably 2; t is from 0 to about 10, preferably 0; and x is from about 1.3 to about 10,

preferably from about 1.3 to about 3, most preferably from about 1.3 to about 2.7. The glycosyl is preferably derived from glucose. To prepare these compounds, the alcohol or alkylpolyethoxy alcohol is formed first and then reacted with glucose, or a source of glucose, to form the glucoside (attachment at the 1-position). The additional glycosyl units can then be attached between their 1-position and the preceding glycosyl units 2-, 3-, 4- and/or 6-position, preferably predominantly the 2-position.

These and other nonionic surfactants are well known in the art, being described in more detail in Kirk Othmer's Encyclopedia of Chemical Technology, 3rd Ed., Vol. 22, pp. 360-379, "Surfactants and Detergent Systems", incorporated by reference herein. Further suitable nonionic detergent surfactants are generally disclosed in U.S. Patent 3,929,678, Laughlin et al., issued December 30, 1975, at column 13, line 14 through column 16, line 6, incorporated herein by reference.

Cationic Surfactants -


Cationic surfactants suitable for use in the compositions of the present invention include those having a long-chain hydrocarbyl group. Examples of such cationic co-surfactants include the ammonium co-surfactants such as alkyldimethylammonium halogenides, and those co-surfactants having the formula:



wherein R^2 is an alkyl or alkyl benzyl group having from 8 to 18 carbon atoms in the alkyl chain, each R^3 is selected from the group consisting of $-CH_2CH_2-$, $-CH_2CH(CH_3)-$, $-CH_2CH(CH_2OH)-$, $-CH_2CH_2CH_2-$, and mixtures thereof; each R^4 is selected from the group consisting of C_1 - C_4 alkyl, C_1 - C_4 hydroxyalkyl, benzyl ring structures formed by joining the two R^4 groups, $-CH_2CHOH-CHOHCOR^6CHOHCH_2OH$ wherein R^6 is any hexose or hexose polymer having a molecular weight less than about 1000, and hydrogen when y is not 0; R^5 is the same as R^4 or is an alkyl chain wherein the total number of carbon atoms of R^2 plus R^5 is not more than about 18; each y is from 0 to about 10 and the sum of the y values is from 0 to about 15; and X is any compatible anion.

Examples of other suitable cationic surfactants are described in following documents, all of which are incorporated by reference herein in their entirety: M.C. Publishing Co., McCutcheon's, Detergents & Emulsifiers, (North American edition 1997); Schwartz, et al., Surface Active Agents, Their Chemistry and Technology, New York: Interscience Publishers, 1949; U.S. Patent 3,155,591; U. S. Patent 3,929,678; U. S. Patent 3,959,461 U. S. Patent 4,387,090 and U.S. Patent 4,228,044.

Examples of suitable cationic surfactants are those corresponding to the general formula:

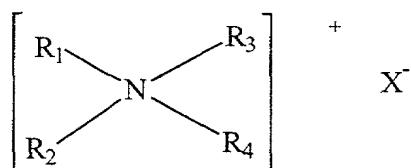


wherein R₁, R₂, R₃, and R₄ are independently selected from an aliphatic group of from 1 to about 22 carbon atoms or an aromatic, alkoxy, polyoxyalkylene, alkylamido, hydroxyalkyl, aryl or alkylaryl group having up to about 22 carbon atoms; and X is a salt-forming anion such as those selected from halogen, (e.g. chloride, bromide), acetate, citrate, lactate, glycolate, phosphate nitrate, sulfate, and alkylsulfate radicals. The aliphatic groups can contain, in addition to carbon and hydrogen atoms, ether linkages, and other groups such as amino groups. The longer chain aliphatic groups, e.g., those of about 12 carbons, or higher, can be saturated or unsaturated. Preferred is when R₁, R₂, R₃, and R₄ are independently selected from C1 to about C22 alkyl. Especially preferred are cationic materials containing two long alkyl chains and two short alkyl chains or those containing one long alkyl chain and three short alkyl chains. The long alkyl chains in the compounds described in the previous sentence have from about 12 to about 22 carbon atoms, preferably from about 16 to about 22 carbon atoms, and the short alkyl chains in the compounds described in the previous sentence have from 1 to about 3 carbon atoms, preferably from 1 to about 2 carbon atoms.

Suitable levels of cationic deterative surfactant herein, when present, are from about 0.1% to about 20%, preferably from about 1% to about 15%, although much higher levels, e.g., up to about 30% or more, may be useful especially in nonionic : cationic (i.e., limited or anionic-free) formulations.

Other Surfactants -

Amphoteric or zwitterionic deterative surfactants when present are usually useful at levels in the range from about 0.1% to about 20% by weight of the detergent composition. Often levels will be limited to about 5% or less, especially when the amphoteric is costly.


Suitable amphoteric surfactants include the amine oxides corresponding to the formula:



wherein R is a primary alkyl group containing 6-24 carbons, preferably 10-18 carbons, and wherein R' and R'' are, each, independently, an alkyl group containing 1 to 6 carbon atoms. The arrow in the formula is a conventional representation of a semi-polar bond.

Amine oxides are semi-polar surfactants and include water-soluble amine oxides containing one alkyl moiety of from about 10 to about 18 carbon atoms and 2 moieties selected from the group consisting of alkyl groups and hydroxyalkyl groups containing from about 1 to about 3 carbon atoms; water-soluble phosphine oxides containing one alkyl moiety of from about 10 to about 18 carbon atoms and 2 moieties selected from the group consisting of alkyl groups and hydroxyalkyl groups containing from about 1 to about 3 carbon atoms; and water-soluble sulfoxides containing one alkyl moiety of from about 10 to about 18 carbon atoms and a moiety selected from the group consisting of alkyl and hydroxyalkyl moieties of from about 1 to about 3 carbon atoms.


Preferred amine oxide surfactants having the formula



wherein R^3 is an alkyl, hydroxyalkyl, or alkyl phenyl group or mixtures thereof containing from about 8 to about 22 carbon atoms; R^4 is an alkylene or hydroxyalkylene group containing from about 2 to about 3 carbon atoms or mixtures thereof; x is from 0 to about 3; and each R^5 is an alkyl or hydroxyalkyl group containing from about 1 to about 3 carbon atoms or a polyethylene oxide group containing from about 1 to about 3 ethylene oxide groups. The R^5 groups can be attached to each other, e.g., through an oxygen or nitrogen atom, to form a ring structure.

These amine oxide surfactants in particular include C₁₀-C₁₈ alkyl dimethyl amine oxides and C₈-C₁₂ alkoxy ethyl dihydroxy ethyl amine oxides. Preferably the amine oxide is present in the composition in an effective amount, more preferably from about 0.1% to about 20%, even more preferably about 0.1% to about 15%, even more preferably still from about 0.5% to about 10%, by weight.

Some suitable zwitterionic surfactants which can be used herein comprise the betaine and betaine-like surfactants wherein the molecule contains both basic and acidic groups which form an inner salt giving the molecule both cationic and anionic hydrophilic groups over a broad range of pH values. Some common examples of these are described in U.S. Pat. Nos. 2,082,275, 2,702,279 and 2,255,082, incorporated herein by reference. One of the preferred zwitterionic compounds have the formula



wherein R¹ is an alkyl radical containing from 8 to 22 carbon atoms, R² and R³ contain from 1 to 3 carbon atoms, R⁴ is an alkylene chain containing from 1 to 3 carbon atoms, X is selected from the group consisting of hydrogen and a hydroxyl radical, Y is selected from the group consisting of carboxyl and sulfonyl radicals and wherein the sum of R¹, R² and R³ radicals is from 14 to 24 carbon atoms.

Zwitterionic surfactants, as mentioned hereinbefore, contain both a cationic group and an anionic group and are in substantial electrical neutrality where the number of anionic charges and cationic charges on the surfactant molecule are substantially the same. Zwitterionics, which typically contain both a quaternary ammonium group and an anionic group selected from sulfonate and carboxylate groups are desirable since they maintain their amphoteric character over most of the pH range of interest for cleaning hard surfaces. The sulfonate group is the preferred anionic group.

Antimicrobial agents - an antimicrobial agent is a compound or substance that kills microorganisms or prevents or inhibits their growth and reproduction. A properly selected antimicrobial agent maintains stability under use and storage conditions (pH, temperature, light, etc.), for a required length of time. A desirable property of the

antimicrobial agent is that it is safe and nontoxic in handling, formulation and use, is environmentally acceptable and cost effective. Classes of antimicrobial agents include, but are not limited to, chlorophenols, aldehydes, biguanides, antibiotics and biologically active salts. Some preferable antimicrobial agent in the antimicrobial is bronopol, chlorhexidine diacetate, TRICOSAN.TM., hexetidine or parachlorometaxylenol (PCMX). More preferably, the antimicrobial agent is TRICOSAN.TM, chlorhexidine diacetate or hexetidine.

The antimicrobial agent, when used, is present in a microbiocidally effective amount, more preferably an from about 0.01% to about 10.0%, more preferably from about 0.1% to about 8.0%, even more preferably from about 0.5% to about 2.0%, by weight of the composition.

Bleaching Agents

Hydrogen peroxide sources are described in detail in the herein incorporated Kirk Othmer's Encyclopedia of Chemical Technology, 4th Ed (1992, John Wiley & Sons), Vol. 4, pp. 271-300 "Bleaching Agents (Survey)", and include the various forms of sodium perborate and sodium percarbonate, including various coated and modified forms. An "effective amount" of a source of hydrogen peroxide is any amount capable of measurably improving stain removal (especially of tea stains) from soiled dishware compared to a hydrogen peroxide source-free composition when the soiled dishware is washed by the consumer in a domestic automatic dishwasher in the presence of alkali.

More generally a source of hydrogen peroxide herein is any convenient compound or mixture which under consumer use conditions provides an effective amount of hydrogen peroxide. Levels may vary widely and are usually in the range from about 0.1% to about 70%, more typically from about 0.5% to about 30%, by weight of the compositions herein.

The preferred source of hydrogen peroxide used herein can be any convenient source, including hydrogen peroxide itself. For example, perborate, e.g., sodium perborate (any hydrate but preferably the mono- or tetra-hydrate), sodium carbonate peroxyhydrate or equivalent percarbonate salts, sodium pyrophosphate peroxyhydrate, urea peroxyhydrate, or sodium peroxide can be used herein. Also useful are sources of available oxygen such as persulfate bleach (e.g., OXONE, manufactured by DuPont).

Sodium perborate monohydrate and sodium percarbonate are particularly preferred. Mixtures of any convenient hydrogen peroxide sources can also be used.

A preferred percarbonate bleach comprises dry particles having an average particle size in the range from about 500 micrometers to about 1,000 micrometers, not more than about 10% by weight of said particles being smaller than about 200 micrometers and not more than about 10% by weight of said particles being larger than about 1,250 micrometers. Optionally, the percarbonate can be coated with a silicate, borate or water-soluble surfactants. Percarbonate is available from various commercial sources such as FMC, Solvay and Tokai Denka.

While not preferred for the compositions of the present invention which comprise deterative enzymes, the present invention compositions may also comprise as the bleaching agent a chlorine-type bleaching material. Such agents are well known in the art, and include for example sodium dichloroisocyanurate ("NaDCC").

Organic Peroxides, especially Diacyl Peroxides

These are extensively illustrated in Kirk Othmer, Encyclopedia of Chemical Technology, Vol. 17, John Wiley and Sons, 1982 at pages 27-90 and especially at pages 63-72, all incorporated herein by reference. If a diacyl peroxide is used, it will preferably be one which exerts minimal adverse impact on spotting/filming. Preferred diacyl peroxides include dibenzoyl peroxide.

Metal-containing Bleach Catalysts

The present invention compositions and methods utilize metal-containing bleach catalysts that are effective for use in ADD compositions. Preferred are manganese and cobalt-containing bleach catalysts.


One type of metal-containing bleach catalyst is a catalyst system comprising a transition metal cation of defined bleach catalytic activity, such as copper, iron, titanium, ruthenium tungsten, molybdenum, or manganese cations, an auxiliary metal cation having little or no bleach catalytic activity, such as zinc or aluminum cations, and a sequestrate having defined stability constants for the catalytic and auxiliary metal cations, particularly ethylenediaminetetraacetic acid, ethylenediaminetetra (methylenephosphonic acid) and water-soluble salts thereof. Such catalysts are disclosed in U.S. Pat. 4,430,243.

Other types of bleach catalysts include the manganese-based complexes disclosed in U.S. Pat. 5,246,621 and U.S. Pat. 5,244,594. Preferred examples of these catalysts include $\text{Mn}^{\text{IV}}_2(\text{u-O})_3(1,4,7\text{-trimethyl-1,4,7-triazacyclononane})_2(\text{PF}_6)_2$ ("MnTACN"), $\text{Mn}^{\text{III}}_2(\text{u-O})_1(\text{u-OAc})_2(1,4,7\text{-trimethyl-1,4,7-triazacyclononane})_2(\text{ClO}_4)_2$, $\text{Mn}^{\text{IV}}_4(\text{u-O})_6(1,4,7\text{-triazacyclononane})_4(\text{ClO}_4)_2$, $\text{Mn}^{\text{III}}\text{Mn}^{\text{IV}}_4(\text{u-O})_1(\text{u-OAc})_2(1,4,7\text{-trimethyl-1,4,7-triazacyclononane})_2(\text{ClO}_4)_3$, and mixtures thereof. See also European patent application publication no. 549,272. Other ligands suitable for use herein include 1,5,9-trimethyl-1,5,9-triazacyclododecane, 2-methyl-1,4,7-triazacyclononane, 2-methyl-1,4,7-triazacyclononane, and mixtures thereof.

The bleach catalysts useful in automatic dishwashing compositions and concentrated powder detergent compositions may also be selected as appropriate for the present invention. For examples of suitable bleach catalysts see U.S. Pat. 4,246,612 and U.S. Pat. 5,227,084.

Other bleach catalysts are described, for example, in European patent application, publication no. 408,131 (cobalt complex catalysts), European patent applications, publication nos. 384,503, and 306,089 (metallo-porphyrin catalysts), U.S. 4,728,455 (manganese/multidentate ligand catalyst), U.S. 4,711,748 and European patent application, publication no. 224,952, (absorbed manganese on aluminosilicate catalyst), U.S. 4,601,845 (aluminosilicate support with manganese and zinc or magnesium salt), U.S. 4,626,373 (manganese/ligand catalyst), U.S. 4,119,557 (ferric complex catalyst), German Pat. specification 2,054,019 (cobalt chelant catalyst) Canadian 866,191 (transition metal-containing salts), U.S. 4,430,243 (chelants with manganese cations and non-catalytic metal cations), and U.S. 4,728,455 (manganese gluconate catalysts).

Preferred are cobalt catalysts which have the formula:




wherein n is an integer from 3 to 5 (preferably 4 or 5; most preferably 5); M' is a labile coordinating moiety, preferably selected from the group consisting of chlorine, bromine, hydroxide, water, and (when m is greater than 1) combinations thereof; m is an integer from 1 to 3 (preferably 1 or 2; most preferably 1); $m+n = 6$; and Y is an appropriately selected counteranion present in a number y, which is an integer from 1 to

3 (preferably 2 to 3; most preferably 2 when Y is a -1 charged anion), to obtain a charge-balanced salt.

The preferred cobalt catalyst of this type useful herein are cobalt pentaamine chloride salts having the formula $[\text{Co}(\text{NH}_3)_5\text{Cl}] \text{Y}_y$, and especially $[\text{Co}(\text{NH}_3)_5\text{Cl}]\text{Cl}_2$.

More preferred are the present invention compositions which utilize cobalt (III) bleach catalysts having the formula:



wherein cobalt is in the +3 oxidation state; n is 4 or 5 (preferably 5); M is one or more ligands coordinated to the cobalt by one site; m is 0, 1 or 2 (preferably 1); B is a ligand coordinated to the cobalt by two sites; b is 0 or 1 (preferably 0), and when b=0, then m+n = 6, and when b=1, then m=0 and n=4; and T is one or more appropriately selected counteranions present in a number y, where y is an integer to obtain a charge-balanced salt (preferably y is 1 to 3; most preferably 2 when T is a -1 charged anion); and wherein further said catalyst has a base hydrolysis rate constant of less than $0.23 \text{ M}^{-1} \text{ s}^{-1}$ (25°C).

Preferred T are selected from the group consisting of chloride, iodide, I_3^- , formate, nitrate, nitrite, sulfate, sulfite, citrate, acetate, carbonate, bromide, PF_6^- , BF_4^- , $\text{B}(\text{Ph})_4^-$, phosphate, phosphite, silicate, tosylate, methanesulfonate, and combinations thereof. Optionally, T can be protonated if more than one anionic group exists in T, e.g., HPO_4^{2-} , HCO_3^- , H_2PO_4^- , etc. Further, T may be selected from the group consisting of non-traditional inorganic anions such as anionic surfactants (e.g., linear alkylbenzene sulfonates (LAS), alkyl sulfates (AS), alkylethoxysulfonates (AES), etc.) and/or anionic polymers (e.g., polyacrylates, polymethacrylates, etc.).

The M moieties include, but are not limited to, for example, F^- , SO_4^{2-} , NCS^- , SCN^- , $\text{S}_2\text{O}_3^{2-}$, NH_3 , PO_4^{3-} , and carboxylates (which preferably are mono-carboxylates, but more than one carboxylate may be present in the moiety as long as the binding to the cobalt is by only one carboxylate per moiety, in which case the other carboxylate in the M moiety may be protonated or in its salt form). Optionally, M can be protonated if more than one anionic group exists in M (e.g., HPO_4^{2-} , HCO_3^- , H_2PO_4^- ,

HOC(O)CH₂C(O)O-, etc.) Preferred M moieties are substituted and unsubstituted C₁-C₃₀ carboxylic acids having the formulas:



wherein R is preferably selected from the group consisting of hydrogen and C₁-C₃₀ (preferably C₁-C₁₈) unsubstituted and substituted alkyl, C₆-C₃₀ (preferably C₆-C₁₈) unsubstituted and substituted aryl, and C₃-C₃₀ (preferably C₅-C₁₈) unsubstituted and substituted heteroaryl, wherein substituents are selected from the group consisting of -NR'₃, -NR'₄⁺, -C(O)OR', -OR', -C(O)NR'₂, wherein R' is selected from the group consisting of hydrogen and C₁-C₆ moieties. Such substituted R therefore include the moieties -(CH₂)_nOH and -(CH₂)_nNR'₄⁺, wherein n is an integer from 1 to about 16, preferably from about 2 to about 10, and most preferably from about 2 to about 5.

Most preferred M are carboxylic acids having the formula above wherein R is selected from the group consisting of hydrogen, methyl, ethyl, propyl, straight or branched C₄-C₁₂ alkyl, and benzyl. Most preferred R is methyl. Preferred carboxylic acid M moieties include formic, benzoic, octanoic, nonanoic, decanoic, dodecanoic, malonic, maleic, succinic, adipic, phthalic, 2-ethylhexanoic, naphthenoic, oleic, palmitic, triflate, tartrate, stearic, butyric, citric, acrylic, aspartic, fumaric, lauric, linoleic, lactic, malic, and especially acetic acid.

The B moieties include carbonate, di- and higher carboxylates (e.g., oxalate, malonate, malic, succinate, maleate), picolinic acid, and alpha and beta amino acids (e.g., glycine, alanine, beta-alanine, phenylalanine).

Cobalt bleach catalysts useful herein are known, being described for example along with their base hydrolysis rates, in M. L. Tobe, "Base Hydrolysis of Transition-Metal Complexes", Adv. Inorg. Bioinorg. Mech., (1983), 2, pages 1-94. For example, Table 1 at page 17, provides the base hydrolysis rates (designated therein as k_{OH}) for cobalt pentaamine catalysts complexed with oxalate (k_{OH}= 2.5 x 10⁻⁴ M⁻¹ s⁻¹ (25°C)), NCS⁻ (k_{OH}= 5.0 x 10⁻⁴ M⁻¹ s⁻¹ (25°C)), formate (k_{OH}= 5.8 x 10⁻⁴ M⁻¹ s⁻¹ (25°C)), and acetate (k_{OH}= 9.6 x 10⁻⁴ M⁻¹ s⁻¹ (25°C)). The most preferred cobalt catalyst useful

herein are cobalt pentaamine acetate salts having the formula $[\text{Co}(\text{NH}_3)_5\text{OAc}] \text{ T}_y$, wherein OAc represents an acetate moiety, and especially cobalt pentaamine acetate chloride, $[\text{Co}(\text{NH}_3)_5\text{OAc}]\text{Cl}_2$; as well as $[\text{Co}(\text{NH}_3)_5\text{OAc}](\text{OAc})_2$; $[\text{Co}(\text{NH}_3)_5\text{OAc}](\text{PF}_6)_2$; $[\text{Co}(\text{NH}_3)_5\text{OAc}](\text{SO}_4)$; $[\text{Co}(\text{NH}_3)_5\text{OAc}](\text{BF}_4)_2$; and $[\text{Co}(\text{NH}_3)_5\text{OAc}](\text{NO}_3)_2$.

Cobalt catalysts according to the present invention made be produced according to the synthetic routes disclosed in U.S. Patent Nos. 5,559,261, 5,581,005, and 5,597,936, the disclosures of which are herein incorporated by reference.

These catalysts may be coprocessed with adjunct materials so as to reduce the color impact if desired for the aesthetics of the product, or to be included in enzyme-containing particles as exemplified hereinafter, or the compositions may be manufactured to contain catalyst "speckles".

As a practical matter, and not by way of limitation, the cleaning compositions and cleaning processes herein can be adjusted to provide on the order of at least one part per hundred million of the active bleach catalyst species in the aqueous washing medium, and will preferably provide from about 0.01 ppm to about 25 ppm, more preferably from about 0.05 ppm to about 10 ppm, and most preferably from about 0.1 ppm to about 5 ppm, of the bleach catalyst species in the wash liquor. In order to obtain such levels in the wash liquor compositions herein will comprise from about 0.0005% to about 0.2%, more preferably from about 0.004% to about 0.08%, of bleach catalyst by weight of the cleaning compositions.

Preferred bleach catalysts, along with methods of there use can be additionally found in U.S. Patents 5,705,464, 5,804,542, 5,798,326, 5,703,030 and 5,599,781, all of which are incorporated herein by reference.

Bleach Activators

Preferably, when composition contains a peroxygen bleach component the composition is formulated with an activator (peracid precursor). Preferred activators are selected from the group consisting of tetraacetyl ethylene diamine (TAED), benzoylcaprolactam (BzCL), 4-nitrobenzoylcaprolactam, 3-chlorobenzoylcaprolactam, benzoyloxybenzenesulphonate (BOBS), nonanoyloxybenzenesulphonate (NOBS), phenyl

benzoate (PhBz), decanoyloxybenzenesulphonate (C₁₀-OBS), benzoylvalerolactam (BZVL), octanoyloxybenzenesulphonate (C₈-OBS), perhydrolyzable esters and mixtures thereof, most preferably benzoylcaprolactam, NOBS, TAED and benzoylvalerolactam. Particularly preferred bleach activators in the pH range from about 8 to about 9.5 are those selected having an OBS or VL leaving group.

Preferred bleach activators are those described in U.S. Patent 5,130,045, Mitchell et al, and 4,412,934, Chung et al, and copending patent applications U. S. Serial Nos. 08/064,624, 08/064,623, 08/064,621, 08/064,562, 08/064,564, 08/082,270 and copending application to M. Burns, A. D. Willey, R. T. Hartshorn, C. K. Ghosh, entitled "Bleaching Compounds Comprising Peroxyacid Activators Used With Enzymes" and having U.S. Serial No. 08/133,691 (P&G Case 4890R), all of which are incorporated herein by reference.

The mole ratio of peroxygen bleaching compound (as AvO) to bleach activator in the present invention generally ranges from at least 1:1, preferably from about 20:1 to about 1:1, more preferably from about 10:1 to about 3:1.

Quaternary substituted bleach activators may also be included. The present detergent compositions preferably comprise a quaternary substituted bleach activator (QSBA) or a quaternary substituted peracid (QSP); more preferably, the former. Preferred QSBA structures are further described in copending U.S. Serial No. 08/298,903, 08/298,650, 08/298,906 and 08/298,904 filed August 31, 1994, incorporated herein by reference.

Levels of bleach activators herein may vary widely, e.g., from about 0.01% to about 90%, by weight of the composition, although lower levels, e.g., more preferably from about 0.1% to about 30%, even more preferably from about 0.1% to about 20%, even more preferably from about 0.5% to about 10%, even more still preferably from about 1% to about 8%, by weight of the composition are more typically used.

Preferred hydrophilic bleach activators include N,N,N',N'-tetraacetyl ethylene diamine (TAED) or any of its close relatives including the triacetyl or other unsymmetrical derivatives. TAED and the acetylated carbohydrates such as glucose pentaacetate and tetraacetyl xylose are preferred hydrophilic bleach activators.


Depending on the application, acetyl triethyl citrate, a liquid, also has some utility, as does phenyl benzoate.

Preferred hydrophobic bleach activators include substituted amide types described in detail hereinafter, such as activators related to NAPAA, and activators related to certain imidoperacid bleaches, for example as described in U.S. Patent 5,061,807, issued October 29, 1991 and assigned to Hoechst Aktiengesellschaft of Frankfurt, Germany.

Other suitable bleach activators include sodium-4-benzoyloxy benzene sulfonate (SBOBS); sodium-1-methyl-2-benzoyloxy benzene-4-sulphonate; sodium-4-methyl-3-benzoyloxy benzoate (SPCC); trimethyl ammonium toluyloxy-benzene sulfonate; or sodium 3,5,5-trimethyl hexanoyloxybenzene sulfonate (STHOBS).


Bleach activators may be used in any amount, typically up to 20%, preferably from 0.1-10% by weight, of the composition, though higher levels, 40% or more, are acceptable, for example in highly concentrated bleach additive product forms or forms intended for appliance automated dosing.

Highly preferred bleach activators useful herein are amide-substituted and have either of the formulae:



or mixtures thereof, wherein R^1 is alkyl, aryl, or alkaryl containing from about 1 to about 14 carbon atoms including both hydrophilic types (short R^1) and hydrophobic types (R^1 is especially from 6, preferably about 8, to about 12), R^2 is alkylene, arylene or alkarylene containing from about 1 to about 14 carbon atoms, R^5 is H, or an alkyl, aryl, or alkaryl containing from about 1 to about 10 carbon atoms, and L is a leaving group which is herein before defined.

Preferred bleach activators also include those of the above general formula wherein L is selected from the group consisting of:



wherein R^3 is as defined above and Y is $-SO_3^-M^+$ or $-CO_2^-M^+$ wherein M is as defined above.


Preferred examples of bleach activators of the above formulae include:

(6-octanamidocaproyl)oxybenzenesulfonate,


(6-nonanamidocaproyl)oxybenzenesulfonate,

(6-decanamidocaproyl)oxybenzenesulfonate, and mixtures thereof.

Other useful activators, disclosed in U.S. 4,966,723, are benzoxazin-type, such as a C_6H_4 ring to which is fused in the 1,2-positions a moiety $-C(O)OC(R^1)=N-$. A highly preferred activator of the benzoxazin-type is:



Acyl lactam activators are very useful herein, especially the acyl caprolactams (see for example WO 94-28102 A) and acyl valerolactams (see U.S. 5,503,639) of the formulae:

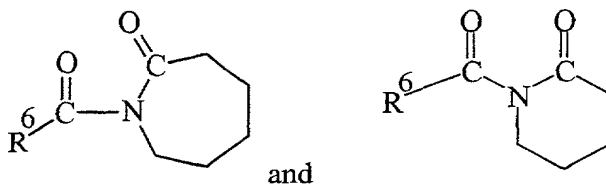

wherein R^6 is H, alkyl, aryl, alkoxyaryl, an alkaryl group containing from 1 to about 12 carbon atoms, or substituted phenyl containing from about 6 to about 18 carbons. See also U.S. 4,545,784 which discloses acyl caprolactams, including benzoyl caprolactam adsorbed into sodium perborate.

Nonlimiting examples of additional activators useful herein are to be found in U.S. 4,915,854, U.S. 4,412,934 and 4,634,551.

Additional activators useful herein include those of U.S. 5,545,349. Examples include esters of an organic acid and ethylene glycol, diethylene glycol or glycerin, or the acid imide of an organic acid and ethylenediamine; wherein the organic acid is selected from methoxyacetic acid, 2-methoxypropionic acid, p-methoxybenzoic acid, ethoxyacetic acid, 2-ethoxypropionic acid, p-ethoxybenzoic acid, propoxyacetic acid, 2-propoxypropionic acid, p-propoxybenzoic acid, butoxyacetic acid, 2-butoxypropionic acid, p-butoxybenzoic acid, 2-methoxyethoxyacetic acid, 2-methoxy-1-methylethoxyacetic acid, 2-methoxy-2-methylethoxyacetic acid, 2-ethoxyethoxyacetic acid, 2-(2-ethoxyethoxy)propionic acid, p-(2-ethoxyethoxy)benzoic acid, 2-ethoxy-1-methylethoxyacetic acid, 2-ethoxy-2-methylethoxyacetic acid, 2-propoxyethoxyacetic acid, 2-propoxy-1-methylethoxyacetic acid, 2-propoxy-2-methylethoxyacetic acid, 2-butoxyethoxyacetic acid, 2-butoxy-1-methylethoxyacetic acid, 2-butoxy-2-methylethoxyacetic acid, 2-(2-methoxyethoxy)ethoxyacetic acid, 2-(2-methoxy-1-methylethoxy)ethoxyacetic acid, 2-(2-methoxy-2-methylethoxy)ethoxyacetic acid and 2-(2-ethoxyethoxy)ethoxyacetic acid.

Useful herein as oxygen bleaches are the inorganic peroxides such as Na_2O_2 , superoxides such as KO_2 , organic hydroperoxides such as cumene hydroperoxide and t-butyl hydroperoxide, and the inorganic peroxyacids and their salts such as the peroxosulfuric acid salts, especially the potassium salts of peroxodisulfuric acid and, more preferably, of peroxomonosulfuric acid including the commercial triple-salt form sold as OXONE by DuPont and also any equivalent commercially available forms such as CUROX from Akzo or CAROAT from Degussa. Certain organic peroxides, such as dibenzoyl peroxide, may be useful, especially as additives rather than as primary oxygen bleach.

Mixed oxygen bleach systems are generally useful, as are mixtures of any oxygen bleaches with the known bleach activators, organic catalysts, enzymatic catalysts and mixtures thereof; moreover such mixtures may further include brighteners, photobleaches and dye transfer inhibitors of types well-known in the art.

Other useful peracids and bleach activators herein are in the family of imidoperacids and imido bleach activators. These include phthaloylimidoperoxycaproic acid and related arylimido-substituted and

acyloxynitrogen derivatives. For listings of such compounds, preparations and their incorporation into laundry compositions including both granules and liquids, See U.S. 5,487,818; U.S. 5,470,988, U.S. 5,466,825; U.S. 5,419,846; U.S. 5,415,796; U.S. 5,391,324; U.S. 5,328,634; U.S. 5,310,934; U.S. 5,279,757; U.S. 5,246,620; U.S. 5,245,075; U.S. 5,294,362; U.S. 5,423,998; U.S. 5,208,340; U.S. 5,132,431 and U.S. 5,087,385.

Additional bleach activators are those described in U.S. Patent 5,130,045, Mitchell et al, and 4,412,934, Chung et al, and copending patent applications U. S. Serial Nos. 08/064,624, 08/064,623, 08/064,621, 08/064,562, 08/064,564, 08/082,270 and copending application to M. Burns, A. D. Willey, R. T. Hartshorn, C. K. Ghosh, entitled "Bleaching Compounds Comprising Peroxyacid Activators Used With Enzymes" and having U.S. Serial No. 08/133,691 (P&G Case 4890R), all of which are incorporated herein by reference.

Quaternary substituted bleach activators may also be included. The present detergent compositions preferably comprise a quaternary substituted bleach activator (QSBA) or a quaternary substituted peracid (QSP); more preferably, the former. Preferred QSBA structures are further described in copending U.S. Patent Nos. 5,460,747, 5,584,888 and 5,578,136, incorporated herein by reference.

Useful diperoxyacids include, for example, 1,12-diperoxydodecanedioic acid (DPDA); 1,9-diperoxyazelaic acid; diperoxybrassicic acid; diperoxysebasic acid and diperoxyisophthalic acid; 2-decyldiperoxybutane-1,4-dioic acid; and 4,4'-sulphonylbisperoxybenzoic acid. Owing to structures in which two relatively hydrophilic groups are disposed at the ends of the molecule, diperoxyacids have sometimes been classified separately from the hydrophilic and hydrophobic monoperacids, for example as "hydrotropic". Some of the diperacids are hydrophobic in a quite literal sense, especially when they have a long-chain moiety separating the peroxyacid moieties.

Reducing Bleaches

Another class of useful bleaches are the so called reducing bleaches. These are bleaches which "reduce" the soil, in the electrochemical sense, instead of oxidizing the soil as conventional bleaches do. Examples of suitable reducing bleaches can be found


in These are extensively illustrated in Kirk Othmer, Encyclopedia of Chemical Technology, Vol. 17, John Wiley and Sons, 1982.

Enzymatic sources of hydrogen peroxide

On a different track from the oxygen bleaching agents illustrated hereinabove, another suitable hydrogen peroxide generating system is a combination of a C₁ -C₄ alkanol oxidase and a C₁ -C₄ alkanol, especially a combination of methanol oxidase (MOX) and ethanol. Such combinations are disclosed in WO 94/03003. Other enzymatic materials related to bleaching, such as peroxidases, haloperoxidases, oxidases, superoxide dismutases, catalases and their enhancers or, more commonly, inhibitors, may be used as optional ingredients in the instant compositions.

Oxygen transfer agents and precursors

Also useful herein are any of the known organic bleach catalysts, oxygen transfer agents or precursors therefor. These include the compounds themselves and/or their precursors, for example any suitable ketone for production of dioxiranes and/or any of the hetero-atom containing analogs of dioxirane precursors or dioxiranes, such as sulfonimines $R^1R^2C=NSO_2R^3$, see EP 446 982 A, published 1991 and sulfonyloxaziridines, for example:



see EP 446,981 A, published 1991. Preferred examples of such materials include hydrophilic or hydrophobic ketones, used especially in conjunction with monoperoxysulfates to produce dioxiranes in situ, and/or the imines described in U.S. 5,576,282 and references described therein. Oxygen bleaches preferably used in conjunction with such oxygen transfer agents or precursors include percarboxylic acids and salts, percarbonic acids and salts, peroxymonosulfuric acid and salts, and mixtures thereof. See also U.S. 5,360,568; U.S. 5,360,569; and U.S. 5,370,826. In a highly preferred embodiment, the invention relates to a detergent composition which incorporates a transition-metal bleach catalyst in accordance with the invention, and organic bleach catalyst such as one named hereinabove, a primary oxidant such as a hydrogen peroxide source, a hydrophilic bleach activator, and at least one additional

detergent, hard-surface cleaner or automatic dishwashing adjunct. Preferred among such compositions are those which further include a precursor for a hydrophobic oxygen bleach such.

Composition pH

Compositions of the invention will have a pH range of from about 2 to about 13, preferably, pH is alkaline, more preferably from about 7 to about 12.5, more preferably from about 8 to about 12, even more preferably from about 9 to about 11.5. If a composition with a pH greater than 7 is to be more effective, it preferably should contain a buffering agent capable of providing a generally more alkaline pH in the composition and in dilute solutions, i.e., about 0.1% to 0.4% by weight aqueous solution, of the composition. The pKa value of this buffering agent should be about 0.5 to 1.0 pH units below the desired pH value of the composition (determined as described above). Preferably, the pKa of the buffering agent should be from about 7 to about 10. Under these conditions the buffering agent most effectively controls the pH while using the least amount thereof.

The buffering agent may be an active detergent in its own right, or it may be a low molecular weight, organic or inorganic material that is used in this composition solely for maintaining an alkaline pH. Preferred buffering agents for compositions of this invention are nitrogen-containing materials. Some examples are amino acids such as lysine or lower alcohol amines like mono-, di-, and tri-ethanolamine. Other preferred nitrogen-containing buffering agents are Tri(hydroxymethyl)amino methane (HOCH₂)₃CNH₃ (TRIS), 2-amino-2-ethyl-1,3-propanediol, 2-amino-2-methyl-propanol, 2-amino-2-methyl-1,3-propanol, disodium glutamate, N-methyl diethanolamide, 1,3-diamino-propanol, N,N'-tetra-methyl-1,3-diamino-2-propanol, N,N-bis(2-hydroxyethyl)glycine (bicine) and N-tris (hydroxymethyl)methyl glycine (tricine). Mixtures of any of the above are also acceptable. Useful inorganic buffers/alkalinity sources include the alkali metal carbonates and alkali metal phosphates, e.g., sodium carbonate, sodium polyphosphate. For additional buffers see McCutcheon's EMULSIFIERS AND DETERGENTS, North American Edition, 1997, McCutcheon Division, MC Publishing Company Kirk and WO 95/07971 both of which are incorporated herein by reference.

The buffering agent, if used, is present in the compositions of the invention herein at a level of from about 0.1% to 15%, preferably from about 1% to 10%, most preferably from about 2% to 8%, by weight of the composition.

Diamines -It is preferred that the diamines used in the present invention are substantially free from impurities. That is, by "substantially free" it is meant that the diamines are over 95% pure, i.e., preferably 97%, more preferably 99%, still more preferably 99.5%, free of impurities. Examples of impurities which may be present in commercially supplied diamines include 2-Methyl-1,3-diaminobutane and alkylhydropyrimidine. Further, it is believed that the diamines should be free of oxidation reactants to avoid diamine degradation and ammonia formation.

It is further preferred that the compositions of the present invention be "malodor" free. That is, that the odor of the headspace does not generate a negative olfactory response from the consumer. This can be achieved in many ways, including the use of perfumes to mask any undesirable odors, the use of stabilizers, such as antioxidants, chelants etc., and/or the use of diamines which are substantially free of impurities. It is believed, without wanting to being limited by theory, that it is the impurities present in the diamines that are the cause of most of the malodors in the compositions of the present invention. These impurities can form during the preparation and storage of the diamines. They can also form during the preparation and storage of the inventive composition. The use of stabilizers such as antioxidants and chelants inhibit and/or prevent the formation of these impurities in the composition from the time of preparation to ultimate use by the consumer and beyond. Hence, it is most preferred to remove, suppress and/or prevent the formation of these malodors by the addition of perfumes, stabilizers and/or the use of diamines which are substantially free from impurities.

Preferred organic diamines are those in which pK1 and pK2 are in the range of about 8.0 to about 11.5, preferably in the range of about 8.4 to about 11, even more preferably from about 8.6 to about 10.75. Preferred materials for performance and supply considerations are 1,3-bis(methylamine)-cyclohexane, 1,3 propane diamine (pK1=10.5; pK2=8.8), 1,6 hexane diamine (pK1=11; pK2=10), 1,3 pentane diamine (Dytek EP) (pK1=10.5; pK2=8.9), 2-methyl 1,5 pentane diamine (Dytek A) (pK1=11.2; pK2=10.0). Other preferred materials are the primary/primary diamines with alkylene


spacers ranging from C4 to C8. In general, it is believed that primary diamines are preferred over secondary and tertiary diamines.

Definition of pK1 and pK2 - As used herein, "pKa1" and "pKa2" are quantities of a type collectively known to those skilled in the art as "pKa". pKa is used herein in the same manner as is commonly known to people skilled in the art of chemistry. Values referenced herein can be obtained from literature, such as from "Critical Stability Constants: Volume 2, Amines" by Smith and Martell, Plenum Press, NY and London, 1975. Additional information on pKa's can be obtained from relevant company literature, such as information supplied by Dupont, a supplier of diamines.

As a working definition herein, the pKa of the diamines is specified in an all-aqueous solution at 25°C and for an ionic strength between 0.1 to 0.5 M. The pKa is an equilibrium constant which can change with temperature and ionic strength; thus, values reported in the literature are sometimes not in agreement depending on the measurement method and conditions. To eliminate ambiguity, the relevant conditions and/or references used for pKa's of this invention are as defined herein or in "Critical Stability Constants: Volume 2, Amines". One typical method of measurement is the potentiometric titration of the acid with sodium hydroxide and determination of the pKa by suitable methods as described and referenced in "The Chemist's Ready Reference Handbook" by Shugar and Dean, McGraw Hill, NY, 1990.

It has been determined that substituents and structural modifications that lower pK1 and pK2 to below about 8.0 are undesirable and cause losses in performance. This can include substitutions that lead to ethoxylated diamines, hydroxy ethyl substituted diamines, diamines with oxygen in the beta (and less so gamma) position to the nitrogen in the spacer group (e.g., Jeffamine EDR 148). In addition, materials based on ethylene diamine are unsuitable.


The diamines useful herein can be defined by the following structure:




wherein R₂₋₅ are independently selected from H, methyl, -CH₃CH₂, and ethylene oxides; C_x and C_y are independently selected from methylene groups or branched alkyl

groups where $x+y$ is from about 3 to about 6; and A is optionally present and is selected from electron donating or withdrawing moieties chosen to adjust the diamine pK_a 's to the desired range. If A is present, then x and y must both be 1 or greater.

Alternatively the preferred diamines can be those with a molecular weight less than or equal to 400 g/mol. It is preferred that these diamines have the formula:




wherein each R^6 is independently selected from the group consisting of hydrogen, C_1 - C_4 linear or branched alkyl, alkyleneoxy having the formula:



wherein R^7 is C_2 - C_4 linear or branched alkylene, and mixtures thereof; R^8 is hydrogen, C_1 - C_4 alkyl, and mixtures thereof; m is from 1 to about 10; X is a unit selected from:

- i) C_3 - C_{10} linear alkylene, C_3 - C_{10} branched alkylene, C_3 - C_{10} cyclic alkylene, C_3 - C_{10} branched cyclic alkylene, an alkyleneoxyalkylene having the formula:




wherein R^7 and m are the same as defined herein above;


- ii) C_3 - C_{10} linear, C_3 - C_{10} branched linear, C_3 - C_{10} cyclic, C_3 - C_{10} branched cyclic alkylene, C_6 - C_{10} arylene, wherein said unit comprises one or more electron donating or electron withdrawing moieties which provide said diamine with a pK_a greater than about 8; and
 - iii) mixtures of (i) and (ii)
- provided said diamine has a pK_a of at least about 8.

Examples of some preferred diamines include the following:


Dimethyl aminopropyl amine:




1,6-Hexane Diamine:




1,3 propane diamine -




2-methyl 1,5 pentane diamine -




1,3-pentanediamine, available under the tradename Dytex EP




1-methyl-diaminopropane -




Jeffamine EDR 148 -



Isophorone diamine -

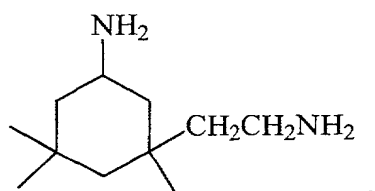

1,3-bis(methylamine)-cyclohexane
and mixtures thereof.



Solvents.

Optionally, the compositions of the present invention may further comprise one or more solvents. These solvents may be used in conjunction with an aqueous liquid carrier or they may be used without any aqueous liquid carrier being present. Solvents are broadly defined as compounds that are liquid at temperatures of 20°C-25°C and which are not considered to be surfactants. One of the distinguishing features is that solvents tend to exist as discrete entities rather than as broad mixtures of compounds. Some solvents which are useful in the hard surface cleaning compositions of the present invention contain from 1 carbon atom to 35 carbon atoms, and contain contiguous linear, branched or cyclic hydrocarbon moieties of no more than 8 carbon atoms. Examples of suitable solvents for the present invention include, methanol, ethanol, propanol, isopropanol, 2-methyl pyrrolidinone, benzyl alcohol and morpholine n-oxide. Preferred among these solvents are methanol and isopropanol.

The compositions used herein may optionally contain an alcohol having a hydrocarbon chain comprising 8 to 18 carbon atoms, preferably 12 to 16. The hydrocarbon chain can be branched or linear, and can be mono, di or polyalcohols. The compositions used herein can optionally comprise from 0.1% to 3% by weight of the total composition of such alcohol, or mixtures thereof, preferably from 0.1% to 1%.

The solvents which can be used herein include all those known to those skilled in the art of hard-surfaces cleaner compositions. Suitable solvents for use herein include ethers and diethers having from 4 to 14 carbon atoms, preferably from 6 to 12 carbon atoms, and more preferably from 8 to 10 carbon atoms. Also other suitable solvents are glycols or alkoxyated glycols, alkoxyated aromatic alcohols, aromatic alcohols, aliphatic branched alcohols, alkoxyated aliphatic branched alcohols, alkoxyated linear C1-C5 alcohols, linear C1-C5 alcohols, C8-C14 alkyl and cycloalkyl hydrocarbons and halohydrocarbons, C6-C16 glycol ethers and mixtures thereof.

Suitable glycols which can be used herein are according to the formula HO-CR1R2-OH wherein R1 and R2 are independently H or a C2-C10 saturated or unsaturated aliphatic hydrocarbon chain and/or cyclic. Suitable glycols to be used herein are dodecaneglycol and/or propanediol.

Suitable alkoxyated glycols which can be used herein are according to the formula R-(A)n-R1-OH wherein R is H, OH, a linear saturated or unsaturated alkyl of

from 1 to 20 carbon atoms, preferably from 2 to 15 and more preferably from 2 to 10, wherein R₁ is H or a linear saturated or unsaturated alkyl of from 1 to 20 carbon atoms, preferably from 2 to 15 and more preferably from 2 to 10, and A is an alkoxy group preferably ethoxy, methoxy, and/or propoxy and n is from 1 to 5, preferably 1 to 2. Suitable alkoxyated glycols to be used herein are methoxy octadecanol and/or ethoxyethoxyethanol.

Suitable alkoxyated aromatic alcohols which can be used herein are according to the formula R (A)_n-OH wherein R is an alkyl substituted or non-alkyl substituted aryl group of from 1 to 20 carbon atoms, preferably from 2 to 15 and more preferably from 2 to 10, wherein A is an alkoxy group preferably butoxy, propoxy and/or ethoxy, and n is an integer of from 1 to 5, preferably 1 to 2. Suitable alkoxyated aromatic alcohols are benzoxyethanol and/or benzoxypropanol.

Suitable aromatic alcohols which can be used herein are according to the formula R-OH wherein R is an alkyl substituted or non-alkyl substituted aryl group of from 1 to 20 carbon atoms, preferably from 1 to 15 and more preferably from 1 to 10. For example a suitable aromatic alcohol to be used herein is benzyl alcohol.

Suitable aliphatic branched alcohols which can be used herein are according to the formula R-OH wherein R is a branched saturated or unsaturated alkyl group of from 1 to 20 carbon atoms, preferably from 2 to 15 and more preferably from 5 to 12. Particularly suitable aliphatic branched alcohols to be used herein include 2-ethylbutanol and/or 2-methylbutanol.

Suitable alkoxyated aliphatic branched alcohols which can be used herein are according to the formula R (A)_n-OH wherein R is a branched saturated or unsaturated alkyl group of from 1 to 20 carbon atoms, preferably from 2 to 15 and more preferably from 5 to 12, wherein A is an alkoxy group preferably butoxy, propoxy and/or ethoxy, and n is an integer of from 1 to 5, preferably 1 to 2. Suitable alkoxyated aliphatic branched alcohols include 1-methylpropoxyethanol and/or 2-methylbutoxyethanol.

Suitable alkoxyated linear C1-C5 alcohols which can be used herein are according to the formula R (A)_n-OH wherein R is a linear saturated or unsaturated alkyl group of from 1 to 5 carbon atoms, preferably from 2 to 4, wherein A is an alkoxy group preferably butoxy, propoxy and/or ethoxy, and n is an integer of from 1 to 5, preferably 1

to 2. Suitable alkoxyated aliphatic linear C1-C5 alcohols are butoxy propoxy propanol (n-BPP), butoxyethanol, butoxypropanol, ethoxyethanol or mixtures thereof. Butoxy propoxy propanol is commercially available under the trade name n-BPP® from Dow chemical.

Suitable linear C1-C5 alcohols which can be used herein are according to the formula R-OH wherein R is a linear saturated or unsaturated alkyl group of from 1 to 5 carbon atoms, preferably from 2 to 4. Suitable linear C1-C5 alcohols are methanol, ethanol, propanol or mixtures thereof.

Other suitable solvents include, but are not limited to, butyl diglycol ether (BDGE), butyltriglycol ether, ter amilic alcohol and the like. Particularly preferred solvents which can be used herein are butoxy propoxy propanol, butyl diglycol ether, benzyl alcohol, butoxypropanol, ethanol, methanol, isopropanol and mixtures thereof.

Typically, the compositions used in the methods of the present invention preferably comprise up to 20% by weight of the total composition of a solvent or mixtures thereof, more preferably from 0.5% to 10%, even more preferably from 3% to 10%. and even more preferably still from 1% to 8%, by weight.

Other suitable solvents for use herein include propylene glycol derivatives such as n-butoxypropanol or n- butoxypropoxypropanol, water-soluble CARBITOL^R solvents or water-soluble CELLOSOLVE^R solvents; water-soluble CARBITOL^R solvents are compounds of the 2-(2-alkoxyethoxy)ethanol class wherein the alkoxy group is derived from ethyl, propyl or butyl; a preferred water-soluble carbitol is 2-(2-butoxyethoxy)ethanol also known as butyl carbitol. Water-soluble CELLOSOLVE^R solvents are compounds of the 2-alkoxyethoxy ethanol class, with 2-butoxyethoxyethanol being preferred. Other suitable solvents include benzyl alcohol, and diols such as 2-ethyl-1, 3-hexanediol and 2,2,4-trimethyl-1,3-pentanediol and mixtures thereof. Some preferred solvents for use herein are n-butoxypropoxypropanol, BUTYL CARBITOL[®] and mixtures thereof.

The solvents can also be selected from the group of compounds comprising ether derivatives of mono-, di- and tri-ethylene glycol, propylene glycol, butylene glycol ethers, and mixtures thereof. The molecular weights of these solvents are preferably less than

350, more preferably between 100 and 300, even more preferably between 115 and 250. Examples of preferred solvents include, for example, mono-ethylene glycol *n*-hexyl ether, mono-propylene glycol *n*-butyl ether, and tri-propylene glycol methyl ether. Ethylene glycol and propylene glycol ethers are commercially available from the Dow Chemical Company under the tradename "Dowanol" and from the Arco Chemical Company under the tradename "Arcosolv". Other preferred solvents including mono- and di-ethylene glycol *n*-hexyl ether are available from the Union Carbide company.

Hydrophobic Solvent

In order to improve cleaning in liquid compositions, one can use a hydrophobic solvent that has cleaning activity. The hydrophobic solvents which may be employed in the hard surface cleaning compositions herein can be any of the well-known "degreasing" solvents commonly used in, for example, the dry cleaning industry, in the hard surface cleaner industry and the metalworking industry.

A useful definition of such solvents can be derived from the solubility parameters as set forth in "The Hoy," a publication of Union Carbide, incorporated herein by reference. The most useful parameter appears to be the hydrogen bonding parameter which is calculated by the formula:

$$\gamma_H = \gamma_T \left[\frac{\alpha - 1}{\alpha} \right]^{1/2}$$

wherein γ_H is the hydrogen bonding parameter, α is the aggregation number,

$$(\text{Log } \alpha = 3.39066 \frac{T_b}{T_c} - 0.15848 - \text{Log } \underline{M}), \text{ and}$$

d

γ_T is the solubility parameter which is obtained from the formula:

$$\gamma_T = \left[\frac{(\Delta H_{25} - RT)d}{M} \right]^{1/2}$$

where ΔH_{25} is the heat of vaporization at 25°C, R is the gas constant (1.987 cal/mole/deg), T is the absolute temperature in °K, T_b is the boiling point in °K, T_c is the critical temperature in °K, d is the density in g/ml, and M is the molecular weight.

For the compositions herein, hydrogen bonding parameters are preferably less than 7.7, more preferably from 2 to 7, or 7.7, and even more preferably from 3 to 6. Solvents with lower numbers become increasingly difficult to solubilize in the compositions and have a greater tendency to cause a haze on glass. Higher numbers require more solvent to provide good greasy/oily soil cleaning.

Hydrophobic solvents are typically used, when present, at a level of from 0.5% to 30%, preferably from 2% to 15%, more preferably from 3% to 8%. Dilute compositions typically have solvents at a level of from 1% to 10%, preferably from 3% to 6%. Concentrated compositions contain from 10% to 30%, preferably from 10% to 20% of solvent.

Many of such solvents comprise hydrocarbon or halogenated hydrocarbon moieties of the alkyl or cycloalkyl type, and have a boiling point well above room temperature, i.e., above 20°C.

One highly preferred solvent is limonene, which not only has good grease removal but also a pleasant odor properties.

The formulator of compositions of the present type will be guided in the selection of solvent partly by the need to provide good grease-cutting properties, and partly by aesthetic considerations. For example, kerosene hydrocarbons function quite well for grease cutting in the present compositions, but can be malodorous. Kerosene must be exceptionally clean before it can be used, even in commercial situations. For home use, where malodors would not be tolerated, the formulator would be more likely to select solvents which have a relatively pleasant odor, or odors which can be reasonably modified by perfuming.

The C₆-C₉ alkyl aromatic solvents, especially the C₆-C₉ alkyl benzenes, preferably octyl benzene, exhibit excellent grease removal properties and have a low, pleasant odor. Likewise, the olefin solvents having a boiling point of at least 100°C, especially alpha-olefins, preferably 1-decene or 1-dodecene, are excellent grease removal solvents.

Generically, glycol ethers useful herein have the formula $R^{11} O-(R^{12}O)_m H$ wherein each R¹¹ is an alkyl group which contains from 3 to 8 carbon atoms, each R¹²

is either ethylene or propylene, and m^1 is a number from 1 to 3. The most preferred glycol ethers are selected from the group consisting of monopropyleneglycolmonopropyl ether, dipropyleneglycolmonobutyl ether, monopropyleneglycolmonobutyl ether, ethyleneglycolmonoethyl ether, ethyleneglycolmonobutyl ether, diethyleneglycolmonoethyl ether, monoethyleneglycolmonoethyl ether, monoethyleneglycolmonobutyl ether, and mixtures thereof.

A particularly preferred type of solvent for these hard surface cleaner compositions comprises diols having from 6 to 16 carbon atoms in their molecular structure. Preferred diol solvents have a solubility in water of from 0.1 to 20 g/100 g of water at 20°C. The diol solvents in addition to good grease cutting ability, impart to the compositions an enhanced ability to remove calcium soap soils from surfaces such as bathtub and shower stall walls. These soils are particularly difficult to remove, especially for compositions which do not contain an abrasive. Other solvents such as benzyl alcohol, n-hexanol, and phthalic acid esters of C₁₋₄ alcohols can also be used.

Solvents such as pine oil, orange terpene, benzyl alcohol, n-hexanol, phthalic acid esters of C₁₋₄ alcohols, butoxy propanol, Butyl Carbitol® and 1(2-n-butoxy-1-methylethoxy)propane-2-ol (also called butoxy propoxy propanol or dipropylene glycol monobutyl ether), hexyl diglycol (Hexyl Carbitol®), butyl triglycol, diols such as 2,2,4-trimethyl-1,3-pentanediol, and mixtures thereof, can be used. The butoxy-propanol solvent should have no more than 20%, preferably no more than 10%, more preferably no more than 7%, of the secondary isomer in which the butoxy group is attached to the secondary atom of the propanol for improved odor.

The level of hydrophobic solvent is preferably, when present, from 1% to 15%, more preferably from 2% to 12%, even more preferably from 5% to 10%.

Hydrotropes

The compositions used in the methods of the present invention may optionally comprise one or more materials which are hydrotropes. Hydrotropes suitable for use in the compositions herein include the C₁-C₃ alkyl aryl sulfonates, C₆-C₁₂ alkanols, C₁-C₆ carboxylic sulfates and sulfonates, urea, C₁-C₆ hydrocarboxylates, C₁-C₄ carboxylates, C₂-C₄ organic diacids and mixtures of these hydrotrope materials. The

composition of the present invention preferably comprises from 0.5% to 8%, by weight of the liquid detergent composition of a hydrotrope selected from alkali metal and calcium xylene and toluene sulfonates.

Suitable C₁-C₃ alkyl aryl sulfonates include sodium, potassium, calcium and ammonium xylene sulfonates; sodium, potassium, calcium and ammonium toluene sulfonates; sodium, potassium, calcium and ammonium cumene sulfonates; and sodium, potassium, calcium and ammonium substituted or unsubstituted naphthalene sulfonates and mixtures thereof.

Suitable C₁-C₈ carboxylic sulfate or sulfonate salts are any water soluble salts or organic compounds comprising 1 to 8 carbon atoms (exclusive of substituent groups), which are substituted with sulfate or sulfonate and have at least one carboxylic group. The substituted organic compound may be cyclic, acyclic or aromatic, i.e. benzene derivatives. Preferred alkyl compounds have from 1 to 4 carbon atoms substituted with sulfate or sulfonate and have from 1 to 2 carboxylic groups. Examples of this type of hydrotrope include sulfosuccinate salts, sulfophthalic salts, sulfoacetic salts, m-sulfobenzoic acid salts and diester sulfosuccinates, preferably the sodium or potassium salts as disclosed in U.S. 3,915,903.

Suitable C₁-C₄ hydrocarboxylates and C₁-C₄ carboxylates for use herein include acetates and propionates and citrates. Suitable C₂-C₄ diacids for use herein include succinic, glutaric and adipic acids.


Other compounds which deliver hydrotropic effects suitable for use herein as a hydrotrope include C₆-C₁₂ alkanols and urea.

Preferred hydrotropes for use herein are sodium, potassium, calcium and ammonium cumene sulfonate; sodium, potassium, calcium and ammonium xylene sulfonate; sodium, potassium, calcium and ammonium toluene sulfonate and mixtures thereof. Most preferred are sodium cumene sulfonate and calcium xylene sulfonate and mixtures thereof. These preferred hydrotrope materials can be present in the composition to the extent of from 0.5% to 8% by weight.


Polymeric Suds Stabilizers

The compositions of the present invention may also contain a polymeric suds stabilizer. The compositions preferably comprise at least an effective amount of the polymeric suds stabilizers described herein, more preferably from about 0.01% to about 10%, even more preferably from about 0.05% to about 5%, even more preferably still preferably from about 0.1% to about 2% by weight, of said composition. What is meant herein by "an effective amount polymeric suds stabilizers " is that the suds volume and suds duration produced by the presently described compositions are sustained for an increased amount of time relative to a composition which does not comprise one or more of the polymeric suds stabilizer described herein. Additionally, the polymeric suds stabilizer can be present as the free base or as a salt. Typical counter ions include, citrate, maleate, sulfate, chloride, etc.


One preferred polymeric suds stabilizer are polymers comprising at least one monomeric unit of the formula:



wherein each of R^1 , R^2 and R^3 are independently selected from the group consisting of hydrogen, C_1 to C_6 alkyl, and mixtures thereof, preferably hydrogen, C_1 to C_3 alkyl, more preferably, hydrogen or methyl. L is selected from the group consisting of a bond, O, NR^6 , SR^7R^8 and mixtures thereof, preferably, O, NR^6 , wherein R^6 is selected from the group consisting of hydrogen, C_1 to C_8 alkyl and mixtures thereof, preferably, hydrogen, C_1 to C_3 , and mixtures thereof, more preferably hydrogen, methyl; each of R^7 and R^8 are independently hydrogen, O, C_1 to C_8 alkyl and mixtures thereof, preferably, hydrogen, C_1 to C_3 , and mixtures thereof, more preferably hydrogen or methyl. By "O", an oxygen linked via a double bond is meant, such as a carbonyl group. Furthermore this means that when either or both R^7R^8 is "O", SR^7R^8 can have the following structures:

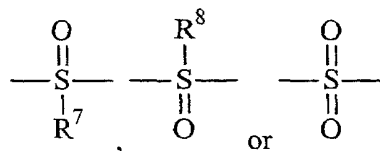


Alternatively, SR^7R^8 form a heterocyclic ring containing from 4 to 7 carbon atoms, optionally containing additional hetero atoms and optionally substituted. For example SR^7R^8 can be:

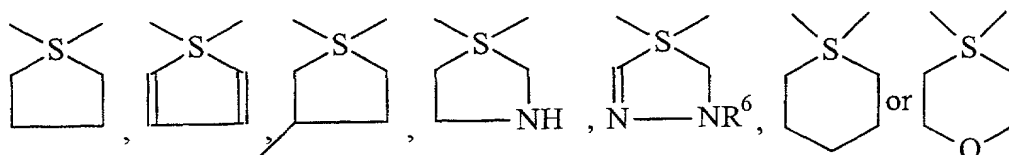


However, it is preferred that SR^7R^8 , when present, is not a heterocycle.

When L is a bond it means that there is a direct link, or a bond, between the carbonyl carbon atom to Z, when z is not zero. For example:

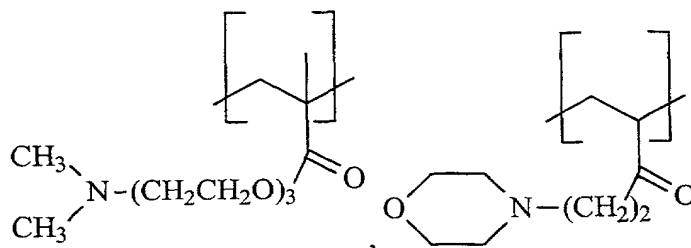


When L is a bond and z is zero, it means L is a bond from the carbonyl atom to A. For example:

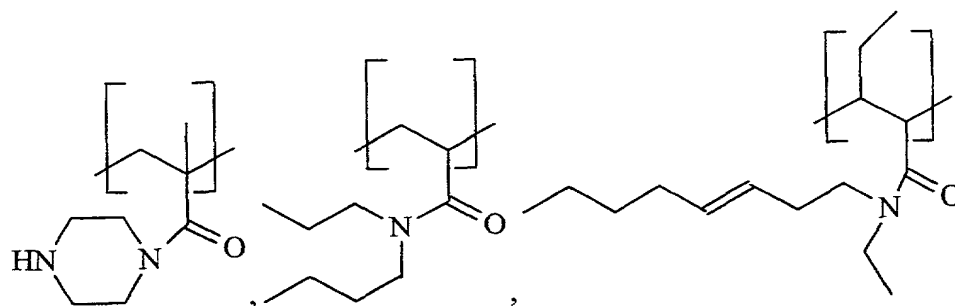

Z is selected from the group consisting of: $-(CH_2)-$, $(CH_2-CH=CH)-$, $-(CH_2-CHOH)-$, $(CH_2-CHNR^6)-$, $-(CH_2-CHR^{14}-O)-$ and mixtures thereof, preferably $-(CH_2)-$. R^{14} is selected from the group consisting of hydrogen, C_1 to C_6 alkyl and mixtures thereof, preferably hydrogen, methyl, ethyl and mixtures thereof; z is an integer selected from about 0 to about 12, preferably about 2 to about 10, more preferably about 2 to about 6.


A is NR^4R^5 . Wherein each of R^4 and R^5 are is independently selected from the group consisting of hydrogen, C_1 - C_8 linear or branched alkyl, alkyleneoxy having the formula:




wherein R^{10} is C_2 - C_4 linear or branched alkylene, and mixtures thereof; R^{11} is hydrogen, C_1 - C_4 alkyl, and mixtures thereof; y is from 1 to about 10. Preferably R^4 and R^5 are independently, hydrogen, C_1 to C_4 alkyl. Alternatively, NR^4R^5 can form a heterocyclic ring containing from 4 to 7 carbon atoms, optionally containing additional hetero atoms, optionally fused to a benzene ring, and optionally substituted by C_1 to C_8 hydrocarbyl. Examples of suitable heterocycles, both substituted and unsubstituted, are indolyl, isoindolyl, imidazolyl, imidazolyl, piperidinyl, pyrazolyl, pyrazolyl, pyridinyl, piperazinyl, pyrrolidinyl, pyrrolidinyl, guanidino, amidino, quinidinyl, thiazolyl, morpholine and mixtures thereof, with morpholino and piperazinyl being preferred. Furthermore the polymeric suds stabilizer has a molecular weight of from about 1,000 to about 2,000,000 preferably from about 5,000 to about 1,000,000, more preferably from about 10,000 to about 750,000, more preferably from about 20,000 to about 500,000, even more preferably from about 35,000 to about 300,000 daltons. The molecular weight of the polymeric suds boosters, can be determined via conventional gel permeation chromatography.

While, it is preferred that the polymeric suds stabilizers be selected from homopolymer, copolymers and terpolymers, other polymers (or multimers) of the at least one monomeric unit, the polymeric suds stabilizers can also be envisioned via polymerization of the at least one monomeric unit with a wider selection of monomers. That is, all the polymeric suds stabilizers can be a homopolymers, copolymers, terpolymers, etc. of the at least one monomeric unit, or the polymeric suds stabilizer can be copolymers, terpolymers, etc. containing one, two or more of the at least one monomeric unit and one, two or more monomeric units other than the at least one monomeric unit. In the copolymer, terpolymer, etc., the distribution of the monomers can be either random or repeating.


Some preferred suds stabilizing polymers are homopolymers, copolymers or terpolymers which comprise at least one monomeric units, selected from:

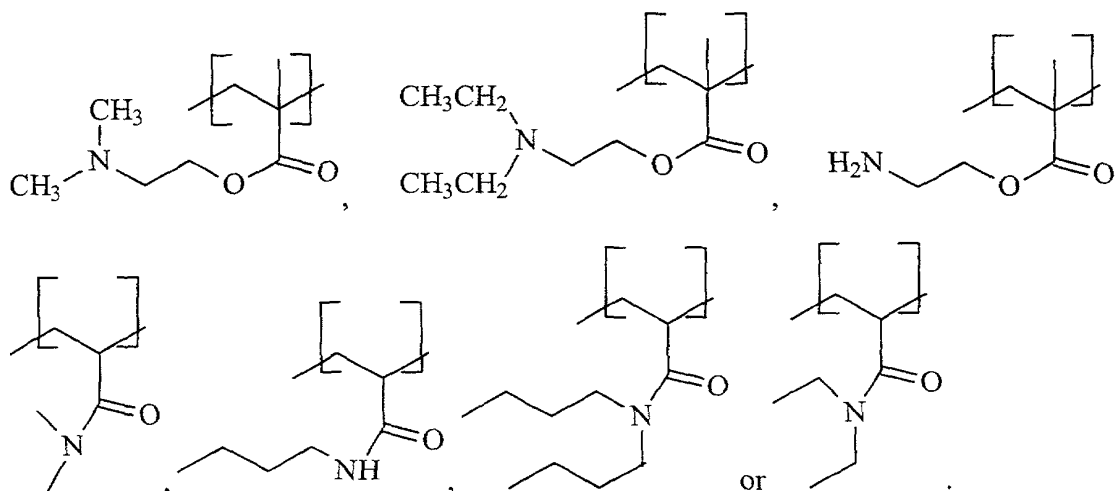


An example of a preferred homopolymer is 2-dimethylaminoethyl methacrylate (DMAM) having the formula:




Some preferred copolymers include:
copolymers of

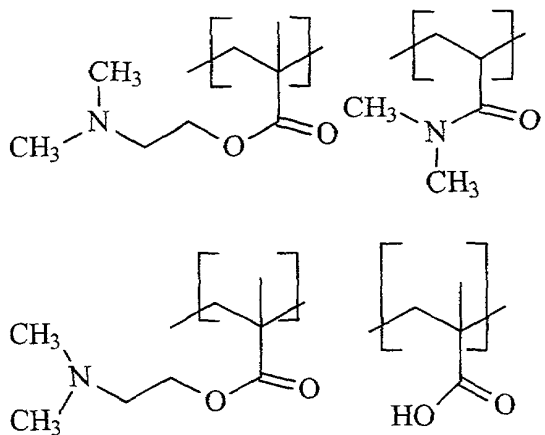

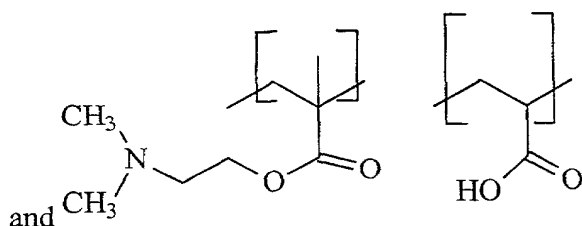


An example of a preferred copolymer is the (DMA)/(DMAM) copolymer having the general formula:

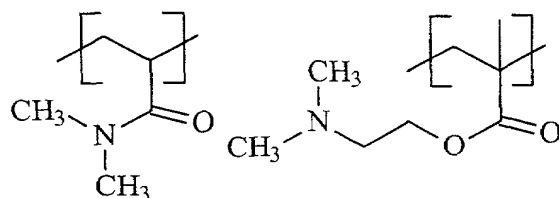

wherein the ratio of (DMA) to (DMAM) is about 1 to about 10, preferably about 1 to about 5, more preferably about 1 to about 3.


An example of a preferred copolymer is the (DMAM)/(DMA) copolymer having the general formula:

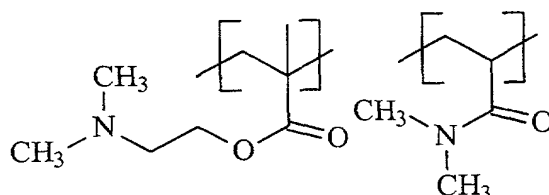

wherein the ratio of (DMAM) to (DMA) is about 1 to about 5, preferably about 1 to about 3.


Another preferred suds stabilizing polymer are the proteinaceous suds stabilizers. These can be peptides, polypeptides, amino acid containing copolymers, and mixtures thereof. Any suitable amino acid can be used to form the backbone of the peptides, polypeptides, or amino acid containing copolymers of the present invention provided at least 10% to about 40% of said amino acids which comprise the peptides are capable of being protonated at a pH of from 7 to about 11.5.

In general, the amino acids suitable for use in forming the proteinaceous suds stabilizers of the present invention have from 2 to 22 carbon atoms, said amino acids having the formula:



wherein R and R¹ are each independently hydrogen, C₁-C₆ linear or branched alkyl, C₁-C₆ substituted alkyl, and mixtures thereof. The indices x and y are each independently from 0 to 2.

An example of a more preferred amino acid according to the present invention is the amino acid lysine having the formula:




wherein R is a substituted C₁ alkyl moiety, said substituent is 4-imidazolyl.

One type of suitable proteinaceous suds stabilizer is comprised entirely of amino acids. Said polyamino acid compounds may be naturally occurring peptides, polypeptides, enzymes, and the like, provided said compounds have an isoelectric point of from about 7 to about 11.5 and a molecular weight greater than or equal to about 1500 daltons. An example of a polyamino acid which is suitable as a proteinaceous suds stabilizer according to the present invention is the enzyme lysozyme.


Another preferred polymeric suds stabilizers are homopolymers or copolymers wherein the monomers which comprise said homopolymers or copolymers contain a moiety capable of being protonated at a pH of from about 4 to about 12, or a moiety capable of being de-protonated at a pH of from about 4 to about 12, of a mixture of both types of moieties.

A preferred class of zwitterionic polymer suitable for use as a suds volume and suds duration enhancer has the formula:




wherein R is C₁-C₁₂ linear alkylene, C₁-C₁₂ branched alkylene, and mixtures thereof; preferably C₁-C₄ linear alkylene, C₃-C₄ branched alkylene; more preferably methylene and 1,2-propylene. R¹ and R² are defined herein after. The index x is from 0 to 6; y is 0 or 1; z is 0 or 1. The index n has the value such that the zwitterionic polymers of the present invention have an average molecular weight of from about 1,000 to about 2,000,000 preferably from about 5,000 to about 1,000,000, more preferably from about 10,000 to about 750,000, more preferably from about 20,000 to about 500,000, even more preferably from about 35,000 to about 300,000 daltons. The molecular weight of the polymeric suds boosters, can be determined via conventional gel permeation chromatography.


Anionic Units - R¹ is a unit capable of having a negative charge at a pH of from about 4 to about 12. Preferred R¹ has the formula:




wherein L is a linking unit independently selected from the following:



mixtures thereof, wherein R' is independently hydrogen, C₁-C₄ alkyl, and mixtures thereof; preferably hydrogen or alternatively R' and S can form a heterocycle of 4 to 7 carbon atoms, optionally containing other hetero atoms and optionally substituted. Preferably the linking group L can be introduced into the molecule as part of the original monomer backbone, for example, a polymer having L units of the formula:



can suitably have this moiety introduced into the polymer via a carboxylate containing monomer, for example, a monomer having the general formula:



When the index i is 0, L is absent.


For anionic units S is a "spacing unit" wherein each S unit is independently selected from C₁-C₁₂ linear alkylene, C₁-C₁₂ branched alkylene, C₃-C₁₂ linear alkenylene, C₃-C₁₂ branched alkenylene, C₃-C₁₂ hydroxyalkylene, C₄-C₁₂ dihydroxyalkylene, C₆-C₁₀ arylene, C₈-C₁₂ dialkylarylene, $-(\text{R}^5\text{O})_k\text{R}^5\text{---}$, $-(\text{R}^5\text{O})_k\text{R}^6(\text{OR}^5)_k\text{---}$, $-\text{CH}_2\text{CH}(\text{OR}^7)\text{CH}_2\text{---}$, and mixtures thereof; wherein R⁵ is C₂-C₄ linear alkylene, C₃-C₄ branched alkylene, and mixtures thereof, preferably ethylene, 1,2-propylene, and mixtures thereof, more preferably ethylene; R⁶ is C₂-C₁₂ linear alkylene, and mixtures thereof, preferably ethylene; R⁷ is hydrogen, C₁-C₄ alkyl, and mixtures thereof, preferably hydrogen. The index k is from 1 to about 20.

R³ is independently selected from hydrogen, $-\text{CO}_2\text{M}$, $-\text{SO}_3\text{M}$, $-\text{OSO}_3\text{M}$, $-\text{CH}_2\text{P}(\text{O})(\text{OM})_2$, $-\text{OP}(\text{O})(\text{OM})_2$, units having the formula:




wherein each R⁸, R⁹, and R¹⁰ is independently selected from the group consisting of hydrogen, $-(\text{CH}_2)_m\text{R}^{11}$, and mixtures thereof, wherein R¹¹ is $-\text{CO}_2\text{H}$, $-\text{SO}_3\text{M}$, $-\text{OSO}_3\text{M}$, $-\text{CH}(\text{CO}_2\text{H})\text{CH}_2\text{CO}_2\text{H}$, $-\text{CH}_2\text{P}(\text{O})(\text{OH})_2$, $-\text{OP}(\text{O})(\text{OH})_2$, and mixtures thereof, preferably $-\text{CO}_2\text{H}$, $-\text{CH}(\text{CO}_2\text{H})\text{CH}_2\text{CO}_2\text{H}$, and mixtures thereof, more preferably $-\text{CO}_2\text{H}$; provided that one R⁸, R⁹, or R¹⁰ is not a hydrogen atom, preferably two R⁸, R⁹, or R¹⁰ units are hydrogen. M is hydrogen or a salt forming cation, preferably hydrogen. The index m has the value from 0 to 10.

Cationic Units - R² is a unit capable of having a positive charge at a pH of from about 4 to about 12. Preferred R² has the formula:



wherein L¹ is a linking unit independently selected from the following:

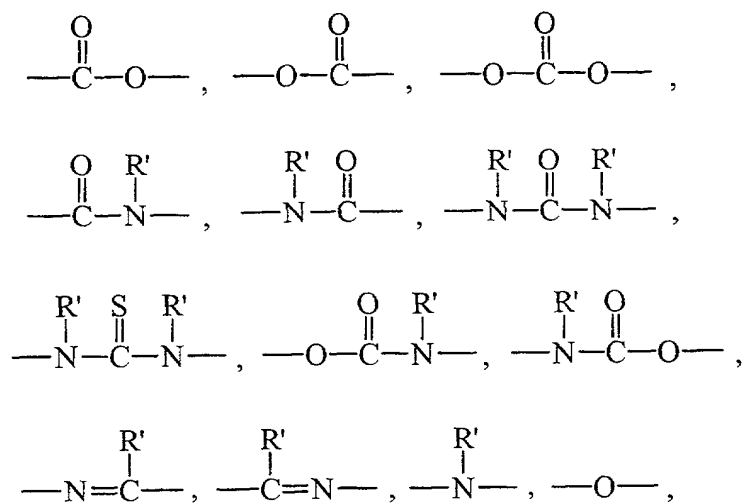


and mixtures thereof; wherein R' is independently hydrogen, C₁-C₄ alkyl, and mixtures thereof; preferably hydrogen or alternatively R' and S can form a heterocycle of 4 to 7 carbon atoms, optionally containing other hetero atoms and optionally substituted.

When the index i' is equal to 0, L¹ is absent.


For cationic units S is a "spacing unit" wherein each S unit is independently selected from C₁-C₁₂ linear alkylene, C₁-C₁₂ branched alkylene, C₃-C₁₂ linear alkenylene, C₃-C₁₂ branched alkenylene, C₃-C₁₂ hydroxyalkylene, C₄-C₁₂ dihydroxyalkylene, C₆-C₁₀ arylene, C₈-C₁₂ dialkylarylene, -(R⁵O)_kR⁵-, -(R⁵O)_kR⁶(OR⁵)_k-, -CH₂CH(OR⁷)CH₂-, and mixtures thereof; wherein R⁵ is C₂-C₄ linear alkylene, C₃-C₄ branched alkylene, and mixtures thereof, preferably ethylene, 1,2-propylene, and mixtures thereof, more preferably ethylene; R⁶ is C₂-C₁₂ linear alkylene, and mixtures thereof, preferably ethylene; R⁷ is hydrogen, C₁-C₄ alkyl, and mixtures thereof, preferably hydrogen. The index k is from 1 to about 20.

R⁴ is independently selected from amino, alkylamino carboxamide, 3-imidazolyl, 4-imidazolyl, 2-imidazolyl, 4-imidazolyl, 2-piperidinyl, 3-piperidinyl, 4-piperidinyl, 1-pyrazolyl, 3-pyrazolyl, 4-pyrazolyl, 5-pyrazolyl, 1-pyrazolyl, 3-pyrazolyl, 4-pyrazolyl, 5-pyrazolyl, 2-pyridinyl, 3-pyridinyl, 4-pyridinyl, piperazinyl, 2-pyrrolidinyl, 3-pyrrolidinyl, guanidino, amidino, and mixtures thereof, preferably dialkylamino having the formula:




wherein each R^{11} is independently hydrogen, $\text{C}_1\text{-C}_4$ alkyl, and mixtures thereof, preferably hydrogen or methyl or alternatively the two R^{11} can form a heterocycle of 4 to 8 carbon atoms, optionally containing other hetero atoms and optionally substituted.

An example of a preferred zwitterionic polymer according to the present invention has the formula:

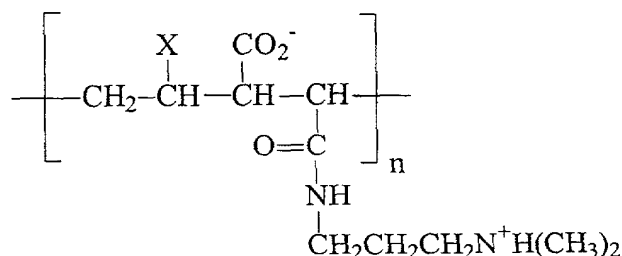


wherein X is C_6 , n has a value such that the average molecular weight is from about 5,000 to about 1,000,000 daltons.

Further preferred zwitterionic polymers according to the present invention are polymers comprising monomers wherein each monomer has only cationic units or anionic units, said polymers have the formula:




wherein R, R^1 , x, y, and z are the same as defined herein above; $n^1 + n^2 = n$ such that n has a value wherein the resulting zwitterionic polymer has a molecular weight of form about 5,000 to about 1,000,000 daltons.

An example of a polymer having monomers with only an anionic unit or a cationic unit has the formula:

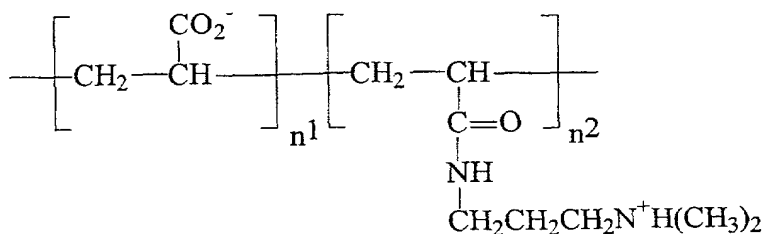

Another preferred zwitterionic polymer according to the present invention are polymers which have limited crosslinking, said polymers having the formula:

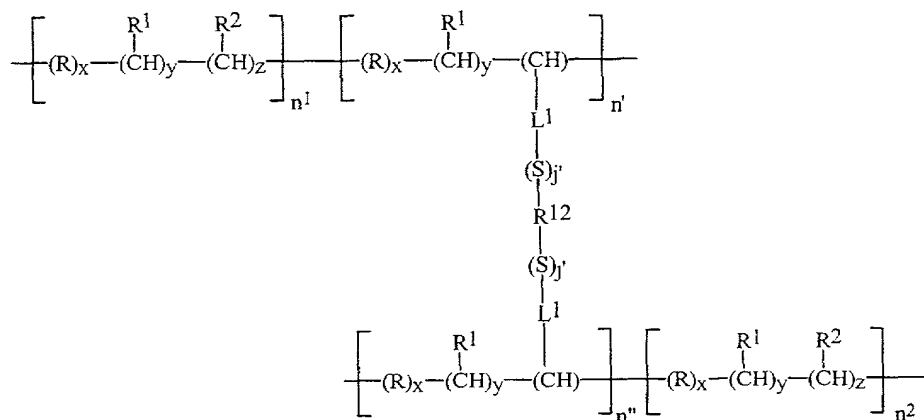


-R¹³-N-R¹³-


The zwitterionic polymers of the present invention may comprise any combination of monomer units, for example, several different monomers having various R¹ and R² groups can be combined to form a suitable suds stabilizer. Alternatively the same R¹ unit may be used with a selection of different R² units and vice versa.

Furthermore another preferred type of polymeric suds stabilizers are polymers which contain units capable of having a cationic charge at a pH of from about 4 to about 12, provided that the suds stabilizer has an average cationic charge density from about 0.0005 to about 0.05 units per 100 daltons molecular weight at a pH of from about 4 to about 12. Additionally, the polymeric suds stabilizer can be present as the free base or as a salt. Typical counter ions include, citrate, maleate, sulfate, chloride, etc.


For the purposes of the present invention the term "cationic unit" is defined as "a moiety which when incorporated into the structure of the suds stabilizers of the present invention, is capable of maintaining a cationic charge within the pH range of from about 4 to about 12. The cationic unit is not required to be protonated at every pH value within the range of about 4 to about 12." Non-limiting examples of units which comprise a cationic moiety include lysine, ornithine, the monomeric unit having the formula:

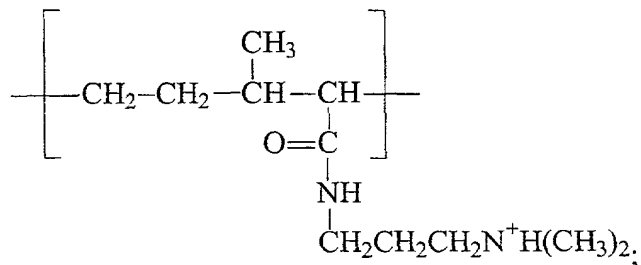


the monomeric unit having the formula:




the monomeric unit having the formula:

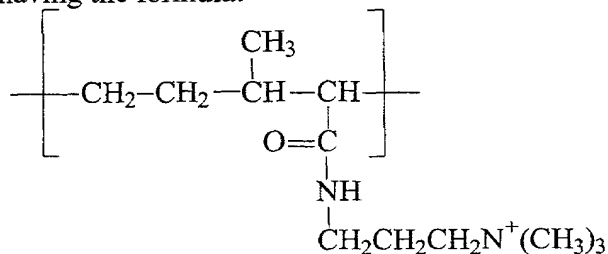

the monomeric unit having the formula:

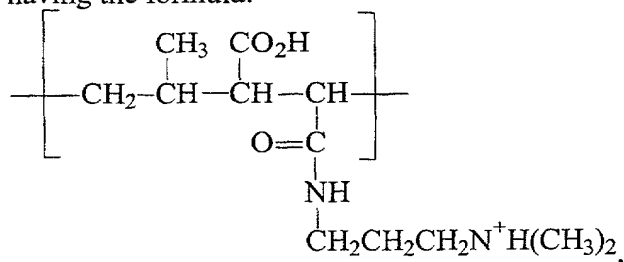


and the monomeric unit having the formula:

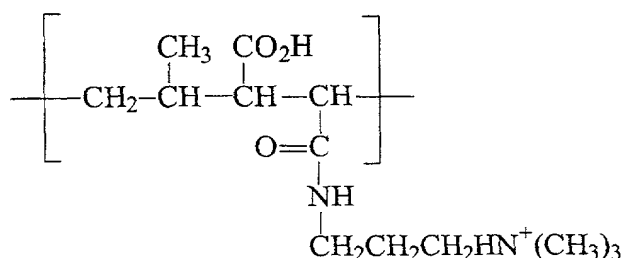


the latter of which also comprises a moiety capable of having an anionic charge at a pH of about 4 to about 12.

For the purposes of the present invention the term "anionic unit" is defined as "a moiety which when incorporated into the structure of the suds stabilizers of the present invention, is capable of maintaining an anionic charge within the pH range of from about 4 to about 12. The anionic unit is not required to be de-protonated at every pH value within the range of about 4 to about 12." Non-limiting examples of units which comprise a anionic moiety include, acrylic acid, methacrylic acid, glutamic acid, aspartic acid, the monomeric unit having the formula:

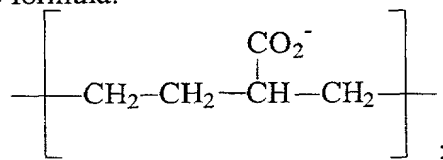

and the monomeric unit having the formula:

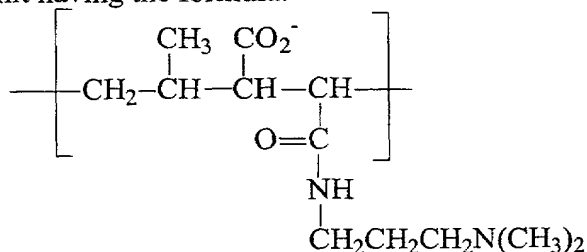

the latter of which also comprises a moiety capable of having a cationic charge at a pH of about 4 to about 12. This latter unit is defined herein as "a unit capable of having an anionic and a cationic charge at a pH of from about 4 to about 12."

For the purposes of the present invention the term "non-charged unit" is defined as "a moiety which when incorporated into the structure of the suds stabilizers of the present invention, has no charge within the pH range of from about 4 to about 12." Non-limiting examples of units which are "non-charged units" are styrene, ethylene, propylene, butylene, 1,2-phenylene, esters, amides, ketones, ethers, and the like.

The units which comprise the polymers of the present invention may, as single units or monomers, have any pK_a value.

The formulator may combine any suitable monomers or units to form a polymeric suds stabilizer, for example, amino acids may be combined with polyacrylate units.

Further information on these and other suitable suds stabilizing polymers, and processes for their preparation are further described in PCT/US98/24853 filed November 20, 1998 (Docket No. 6938), PCT/US98/24707 filed November 20, 1998 (Docket No. 6939), PCT/US98/24699 filed November 20, 1998 (Docket No. 6943), and PCT/US98/24852 filed November 20, 1998 (Docket No. 6944).

Enzymes - Detergent compositions of the present invention may further comprise one or more enzymes which provide cleaning performance benefits. Said enzymes include enzymes selected from cellulases, hemicellulases, peroxidases, proteases, gluco-amylases, amylases, lipases, cutinases, pectinases, xylanases, reductases, oxidases, phenoloxidases, lipoxygenases, ligninases, pullulanases, tannases, pentosanases, malanases, β -glucanases, arabinosidases or mixtures thereof. A preferred combination is a detergent composition having a cocktail of conventional applicable enzymes like protease, amylase, lipase, cutinase and/or cellulase. Enzymes when present in the compositions, at from about 0.0001% to about 5% of active enzyme by weight of the detergent composition.

Proteolytic Enzyme - The proteolytic enzyme can be of animal, vegetable or microorganism (preferred) origin. The proteases for use in the detergent compositions herein include (but are not limited to) trypsin, subtilisin, chymotrypsin and elastase-type proteases. Preferred for use herein are subtilisin-type proteolytic enzymes. Particularly preferred is bacterial serine proteolytic enzyme obtained from Bacillus subtilis and/or Bacillus licheniformis.

Suitable proteolytic enzymes include Novo Industri A/S Alcalase[®] (preferred), Esperase[®], Savinase[®] (Copenhagen, Denmark), Gist-brocades' Maxatase[®], Maxacal[®] and Maxapem 15[®] (protein engineered Maxacal[®]) (Delft, Netherlands), and subtilisin BPN and BPN' (preferred), which are commercially available. Preferred proteolytic enzymes are also modified bacterial serine proteases, such as those made by Genencor International, Inc. (San Francisco, California) which are described in European Patent 251,446B, granted December 28, 1994 (particularly pages 17, 24 and 98) and which are also called herein "Protease B". U.S. Patent 5,030,378, Venegas, issued July 9, 1991,

refers to a modified bacterial serine proteolytic enzyme (Genencor International) which is called "Protease A" herein (same as BPN'). In particular see columns 2 and 3 of U.S. Patent 5,030,378 for a complete description, including amino sequence, of Protease A and its variants. Other proteases are sold under the tradenames: Primase, Durazym, Opticlean and Optimase. Preferred proteolytic enzymes, then, are selected from the group consisting of Alcalase[®] (Novo Industri A/S), BPN', Protease A and Protease B (Genencor), and mixtures thereof. Protease B is most preferred.

Of particular interest for use herein are the proteases described in U.S. Patent No. 5,470,733.

Also proteases described in our co-pending application USSN 08/136,797 can be included in the detergent composition of the invention.

Another preferred protease, referred to as "Protease D" is a carbonyl hydrolase variant having an amino acid sequence not found in nature, which is derived from a precursor carbonyl hydrolase by substituting a different amino acid for a plurality of amino acid residues at a position in said carbonyl hydrolase equivalent to position +76, preferably also in combination with one or more amino acid residue positions equivalent to those selected from the group consisting of +99, +101, +103, +104, +107, +123, +27, +105, +109, +126, +128, +135, +156, +166, +195, +197, +204, +206, +210, +216, +217, +218, +222, +260, +265, and/or +274 according to the numbering of *Bacillus amyloliquefaciens* subtilisin, as described in WO 95/10615 published April 20, 1995 by Genencor International (A. Baeck et al. entitled "Protease-Containing Cleaning Compositions" having U.S. Serial No. 08/322,676, filed October 13, 1994).

Useful proteases are also described in PCT publications: WO 95/30010 published November 9, 1995 by The Procter & Gamble Company; WO 95/30011 published November 9, 1995 by The Procter & Gamble Company; WO 95/29979 published November 9, 1995 by The Procter & Gamble Company.

Protease enzyme may be incorporated into the compositions in accordance with the invention at a level of from 0.0001% to 2% active enzyme by weight of the composition.

Amylase - Amylases (α and/or β) can be included for removal of carbohydrate-based stains. Suitable amylases are Termamyl[®] (Novo Nordisk), Fungamyl[®] and BAN[®] (Novo Nordisk). The enzymes may be of any suitable origin,

such as vegetable, animal, bacterial, fungal and yeast origin. Amylase enzymes are normally incorporated in the detergent composition at levels from 0.0001% to 2%, preferably from about 0.0001% to about 0.5%, more preferably from about 0.0005% to about 0.1%, even more preferably from about 0.001% to about 0.05% of active enzyme by weight of the detergent composition.

Amylase enzymes also include those described in WO95/26397 and in co-pending application by Novo Nordisk PCT/DK96/00056. Other specific amylase enzymes for use in the detergent compositions of the present invention therefore include :

(a) α -amylases characterised by having a specific activity at least 25% higher than the specific activity of Termamyl[®] at a temperature range of 25°C to 55°C and at a pH value in the range of 8 to 10, measured by the Phadebas[®] α -amylase activity assay. Such Phadebas[®] α -amylase activity assay is described at pages 9-10, WO95/26397.

(b) α -amylases according (a) comprising the amino sequence shown in the SEQ ID listings in the above cited reference. or an α -amylase being at least 80% homologous with the amino acid sequence shown in the SEQ ID listing.

(c) α -amylases according (a) obtained from an alkalophilic *Bacillus* species, comprising the following amino sequence in the N-terminal : His-His-Asn-Gly-Thr-Asn-Gly-Thr-Met-Met-Gln-Tyr-Phe-Glu-Trp-Tyr-Leu-Pro-Asn-Asp.

A polypeptide is considered to be X% homologous to the parent amylase if a comparison of the respective amino acid sequences, performed via algorithms, such as the one described by Lipman and Pearson in Science 227, 1985, p. 1435, reveals an identity of X%

(d) α -amylases according (a-c) wherein the α -amylase is obtainable from an alkalophilic *Bacillus* species; and in particular, from any of the strains NCIB 12289, NCIB 12512, NCIB 12513 and DSM 935.

In the context of the present invention, the term "obtainable from" is intended not only to indicate an amylase produced by a *Bacillus* strain but also an amylase encoded by a DNA sequence isolated from such a *Bacillus* strain and produced in an host organism transformed with said DNA sequence.

(e) α -amylase showing positive immunological cross-reactivity with antibodies raised against an α -amylase having an amino acid sequence corresponding respectively to those α -amylases in (a-d).

(f) Variants of the following parent α -amylases which (i) have one of the amino acid sequences shown in corresponding respectively to those α -amylases in (a-e), or (ii) displays at least 80% homology with one or more of said amino acid sequences, and/or displays immunological cross-reactivity with an antibody raised against an α -amylase having one of said amino acid sequences, and/or is encoded by a DNA sequence which hybridizes with the same probe as a DNA sequence encoding an α -amylase having one of said amino acid sequence; in which variants :

1. at least one amino acid residue of said parent α -amylase has been deleted; and/or
2. at least one amino acid residue of said parent α -amylase has been replaced by a different amino acid residue; and/or
3. at least one amino acid residue has been inserted relative to said parent α -amylase;

said variant having an α -amylase activity and exhibiting at least one of the following properties relative to said parent α -amylase : increased thermostability, increased stability towards oxidation, reduced Ca ion dependency, increased stability and/or α -amylolytic activity at neutral to relatively high pH values, increased α -amylolytic activity at relatively high temperature and increase or decrease of the isoelectric point (pI) so as to better match the pI value for α -amylase variant to the pH of the medium.

Said variants are described in the patent application PCT/DK96/00056.

Other amylases suitable herein include, for example, α -amylases described in GB 1,296,839 to Novo; RAPIDASE®, International Bio-Synthetics, Inc. and TERMAMYL®, Novo. FUNGAMYL® from Novo is especially useful. Engineering of enzymes for improved stability, e.g., oxidative stability, is known. See, for example J. Biological Chem., Vol. 260, No. 11, June 1985, pp. 6518-6521. Certain preferred embodiments of the present compositions can make use of amylases having improved

stability in detergents such as automatic dishwashing types, especially improved oxidative stability as measured against a reference-point of TERMAMYL® in commercial use in 1993. These preferred amylases herein share the characteristic of being "stability-enhanced" amylases, characterized, at a minimum, by a measurable improvement in one or more of: oxidative stability, e.g., to hydrogen peroxide/tetraacetylenediamine in buffered solution at pH 9-10; thermal stability, e.g., at common wash temperatures such as about 60°C; or alkaline stability, e.g., at a pH from about 8 to about 11, measured versus the above-identified reference-point amylase. Stability can be measured using any of the art-disclosed technical tests. See, for example, references disclosed in WO 9402597. Stability-enhanced amylases can be obtained from Novo or from Genencor International. One class of highly preferred amylases herein have the commonality of being derived using site-directed mutagenesis from one or more of the *Bacillus* amylases, especially the *Bacillus* α -amylases, regardless of whether one, two or multiple amylase strains are the immediate precursors. Oxidative stability-enhanced amylases vs. the above-identified reference amylase are preferred for use, especially in bleaching, more preferably oxygen bleaching, as distinct from chlorine bleaching, detergent compositions herein. Such preferred amylases include (a) an amylase according to the hereinbefore incorporated WO 9402597, Novo, Feb. 3, 1994, as further illustrated by a mutant in which substitution is made, using alanine or threonine, preferably threonine, of the methionine residue located in position 197 of the *B. licheniformis* alpha-amylase, known as TERMAMYL®, or the homologous position variation of a similar parent amylase, such as *B. amyloliquefaciens*, *B. subtilis*, or *B. stearothermophilus*; (b) stability-enhanced amylases as described by Genencor International in a paper entitled "Oxidatively Resistant alpha-Amylases" presented at the 207th American Chemical Society National Meeting, March 13-17 1994, by C. Mitchinson. Therein it was noted that bleaches in automatic dishwashing detergents inactivate alpha-amylases but that improved oxidative stability amylases have been made by Genencor from *B. licheniformis* NCIB8061. Methionine (Met) was identified as the most likely residue to be modified. Met was substituted, one at a time, in positions 8, 15, 197, 256, 304, 366 and 438 leading to specific mutants, particularly important being M197L and M197T with the M197T variant being the most stable expressed variant.

Stability was measured in CASCADE® and SUNLIGHT®; (c) particularly preferred amylases herein include amylase variants having additional modification in the immediate parent as described in WO 9510603 A and are available from the assignee, Novo, as DURAMYL®. Other particularly preferred oxidative stability enhanced amylase include those described in WO 9418314 to Genencor International and WO 9402597 to Novo. Any other oxidative stability-enhanced amylase can be used, for example as derived by site-directed mutagenesis from known chimeric, hybrid or simple mutant parent forms of available amylases. Other preferred enzyme modifications are accessible. See WO 9509909 A to Novo.

Various carbohydrase enzymes which impart antimicrobial activity may also be included in the present invention. Such enzymes include endoglycosidase, Type II endoglycosidase and glucosidase as disclosed in U.S. Patent Nos. 5,041,236, 5,395,541, 5,238,843 and 5,356,803 the disclosures of which are herein incorporated by reference. Of course, other enzymes having antimicrobial activity may be employed as well including peroxidases, oxidases and various other enzymes.

It is also possible to include an enzyme stabilization system into the compositions of the present invention when any enzyme is present in the composition.

Perfumes - Perfumes and perfumery ingredients useful in the present compositions and processes comprise a wide variety of natural and synthetic chemical ingredients, including, but not limited to, aldehydes, ketones, esters, and the like. Also included are various natural extracts and essences which can comprise complex mixtures of ingredients, such as orange oil, lemon oil, rose extract, lavender, musk, patchouli, balsamic essence, sandalwood oil, pine oil, cedar, and the like. Finished perfumes can comprise extremely complex mixtures of such ingredients. Finished perfumes typically comprise from about 0.01% to about 2%, by weight, of the detergent compositions herein, and individual perfumery ingredients can comprise from about 0.0001% to about 90% of a finished perfume composition.

Non-limiting examples of perfume ingredients useful herein include: 7-acetyl-1,2,3,4,5,6,7,8-octahydro-1,1,6,7-tetramethyl naphthalene; ionone methyl; ionone gamma methyl; methyl cedrylone; methyl dihydrojasmonate; methyl 1,6,10-trimethyl-2,5,9-cyclododecatrien-1-yl ketone; 7-acetyl-1,1,3,4,4,6-hexamethyl tetralin; 4-acetyl-6-

tert-butyl-1,1-dimethyl indane; para-hydroxy-phenyl-butanone; benzophenone; methyl beta-naphthyl ketone; 6-acetyl-1,1,2,3,3,5-hexamethyl indane; 5-acetyl-3-isopropyl-1,1,2,6-tetramethyl indane; 1-dodecanal, 4-(4-hydroxy-4-methylpentyl)-3-cyclohexene-1-carboxaldehyde; 7-hydroxy-3,7-dimethyl octanal; 10-undecen-1-al; iso-hexenyl cyclohexyl carboxaldehyde; formyl tricyclodecane; condensation products of hydroxycitronellal and methyl anthranilate, condensation products of hydroxycitronellal and indol, condensation products of phenyl acetaldehyde and indol; 2-methyl-3-(para-tert-butylphenyl)-propionaldehyde; ethyl vanillin; heliotropin; hexyl cinnamic aldehyde; amyl cinnamic aldehyde; 2-methyl-2-(para-iso-propylphenyl)-propionaldehyde; coumarin; decalactone gamma; cyclopentadecanolide; 16-hydroxy-9-hexadecenoic acid lactone; 1,3,4,6,7,8-hexahydro-4,6,6,7,8,8-hexamethylcyclopenta-gamma-2-benzopyrane; beta-naphthol methyl ether; ambroxane; dodecahydro-3a,6,6,9a-tetramethylnaphtho[2,1b]furan; cedrol, 5-(2,2,3-trimethylcyclopent-3-enyl)-3-methylpentan-2-ol; 2-ethyl-4-(2,2,3-trimethyl-3-cyclopenten-1-yl)-2-buten-1-ol; caryophyllene alcohol; tricyclodecenyl propionate; tricyclodecenyl acetate; benzyl salicylate; cedryl acetate; and para-(tert-butyl) cyclohexyl acetate.

Particularly preferred perfume materials are those that provide the largest odor improvements in finished product compositions containing cellulases. These perfumes include but are not limited to: hexyl cinnamic aldehyde; 2-methyl-3-(para-tert-butylphenyl)-propionaldehyde; 7-acetyl-1,2,3,4,5,6,7,8-octahydro-1,1,6,7-tetramethyl naphthalene; benzyl salicylate; 7-acetyl-1,1,3,4,4,6-hexamethyl tetralin; para-tert-butyl cyclohexyl acetate; methyl dihydro jasmonate; beta-naphthol methyl ether; methyl beta-naphthyl ketone; 2-methyl-2-(para-iso-propylphenyl)-propionaldehyde; 1,3,4,6,7,8-hexahydro-4,6,6,7,8,8-hexamethyl-cyclopenta-gamma-2-benzopyrane; dodecahydro-3a,6,6,9a-tetramethylnaphtho[2,1b]furan; anisaldehyde; coumarin; cedrol; vanillin; cyclopentadecanolide; tricyclodecenyl acetate; and tricyclodecenyl propionate.

Other perfume materials include essential oils, resinoids, and resins from a variety of sources including, but not limited to: Peru balsam, Olibanum resinoid, styrax, labdanum resin, nutmeg, cassia oil, benzoin resin, coriander and lavandin. Still other perfume chemicals include phenyl ethyl alcohol, terpineol, linalool, linalyl acetate,

geraniol, nerol, 2-(1,1-dimethylethyl)-cyclohexanol acetate, benzyl acetate, and eugenol. Carriers such as diethylphthalate can be used in the finished perfume compositions.

Dispersant Polymers

The compositions used in the methods of the present invention may also optionally contain from about 0.1% to about 20%, more preferably from about 0.5% to about 10% by weight of the composition of a dispersant polymer. Dispersant polymers are compounds which act as soil suspending agents in the aqueous wash liquor. That is, they act to suspend the soils in solution and prevent the soils from re-depositing on the surfaces of fabrics or dishes. This allows soils to be removed with the wash liquor. Dispersant polymers are well-known and conventional and are available from BASF Corp. and Rohm & Haas. Typical examples include polyethoxylated amines and acrylic acid/maleic acid copolymers.

Soil Release Agents

The compositions according to the present invention may optionally comprise one or more soil release agents. Polymeric soil release agents are characterized by having both hydrophilic segments, to hydrophilize the surface of hydrophobic fibers, such as polyester and nylon, and hydrophobic segments, to deposit upon hydrophobic fibers and remain adhered thereto through completion of the laundry cycle and , thus, serve as an anchor for the hydrophilic segments. This can enable stains occurring subsequent to treatment with the soil release agent to be more easily cleaned in later washing procedures.

If utilized, soil release agents will generally comprise from about 0.01% to about 10% preferably from about 0.1% to about 5%, more preferably from about 0.2% to about 3% by weight, of the composition.

The following, all included herein by reference, describe soil release polymers suitable for us in the present invention. U.S. 5,691,298 Gosselink et al., issued November 25, 1997; U.S. 5,599,782 Pan et al., issued February 4, 1997; U.S. 5,415,807 Gosselink et al., issued May 16, 1995; U.S. 5,182,043 Morrall et al., issued January 26, 1993; U.S. 4,956,447 Gosselink et al., issued September 11, 1990; U.S. 4,976,879 Maldonado et al. issued December 11, 1990; U.S. 4,968,451 Scheibel et al., issued November 6, 1990; U.S. 4,925,577 Borchert, Sr. et al., issued May 15, 1990; U.S.

4,861,512 Gosselink, issued August 29, 1989; U.S. 4,877,896 Maldonado et al., issued October 31, 1989; U.S. 4,771,730 Gosselink et al., issued October 27, 1987; U.S. 711,730 Gosselink et al., issued December 8, 1987; U.S. 4,721,580 Gosselink issued January 26, 1988; U.S. 4,000,093 Nicol et al., issued December 28, 1976; U.S. 3,959,230 Hayes, issued May 25, 1976; U.S. 3,893,929 Basadur, issued July 8, 1975; and European Patent Application 0 219 048, published April 22, 1987 by Kud et al.

Further suitable soil release agents are described in U.S. 4,201,824 Voilland et al.; U.S. 4,240,918 Lagasse et al.; U.S. 4,525,524 Tung et al.; U.S. 4,579,681 Ruppert et al.; U.S. 4,220,918; U.S. 4,787,989; EP 279,134 A, 1988 to Rhone-Poulenc Chemie; EP 457,205 A to BASF (1991); and DE 2,335,044 to Unilever N.V., 1974; all incorporated herein by reference.

Brightener

Any optical brighteners or other brightening or whitening agents known in the art can be present at levels typically from about 0.05% to about 1.2%, by weight, in the compositions used herein. Commercial optical brighteners which may be useful in the present invention can be classified into subgroups, which include, but are not necessarily limited to, derivatives of stilbene, pyrazoline, coumarin, carboxylic acid, methinecyanines, dibenzothiophene-5,5-dioxide, azoles, 5- and 6-membered-ring heterocycles, and other miscellaneous agents. Examples of such brighteners are disclosed in "The Production and Application of Fluorescent Brightening Agents", M. Zahradnik, Published by John Wiley & Sons, New York (1982).

Specific examples of optical brighteners which are useful in the present compositions are those identified in U.S. Patent 4,790,856, issued to Wixon on December 13, 1988. These brighteners include the PHORWHITE series of brighteners from Verona. Other brighteners disclosed in this reference include: Tinopal UNPA, Tinopal CBS and Tinopal 5BM; available from Ciba-Geigy; Artic White CC and Artic White CWD, available from Hilton-Davis, located in Italy; the 2-(4-styryl-phenyl)-2H-naphthol[1,2-d]triazoles; 4,4'-bis-(1,2,3-triazol-2-yl)-stilbenes; 4,4'-bis(styryl)bisphenyls; and the aminocoumarins. Specific examples of these brighteners include 4-methyl-7-diethyl-amino coumarin; 1,2-bis(-venzimidazol-2-yl)ethylene; 1,3-diphenyl-phrazolines; 2,5-bis(benzoxazol-2-yl)thiophene; 2-styryl-naphth-[1,2-d]oxazole; and 2-(stilbene-4-yl)-

2H-naphtho- [1,2-d]triazole. See also U.S. Patent 3,646,015, issued February 29, 1972 to Hamilton. Anionic brighteners are preferred herein.

Other Ingredients - The compositions can further preferably comprise one or more deterative adjuncts selected from the following: polysaccharides, abrasives, bactericides, tarnish inhibitors, dyes, buffers, antifungal or mildew control agents, insect repellents, perfumes, thickeners, processing aids, anti-corrosive aids, stabilizers and antioxidants. A wide variety of other ingredients useful in detergent compositions can be included in the compositions herein, including other active ingredients, carriers, antioxidants, processing aids, dyes or pigments, solvents for liquid formulations, etc.

Usual ingredients can include one or more materials for assisting or enhancing cleaning performance, treatment of the substrate to be cleaned, or to modify the aesthetics of the composition. Usual deterative adjuncts of detergent compositions include the ingredients set forth in U.S. Pat. No. 3,936,537, Baskerville et al. Adjuncts which can also be used in the compositions employed in the present invention, in their conventional art-established levels for use (generally from 0% to about 20% of the detergent ingredients, preferably from about 0.5% to about 10%), include other active ingredients such as enzyme stabilizers, color speckles, anti-tarnish and/or anti-corrosion agents, dyes, fillers, optical brighteners, germicides, alkalinity sources, anti-oxidants, enzyme stabilizing agents, perfumes, dyes, solubilizing agents, clay soil removal/anti-redeposition agents, carriers, processing aids, pigments, solvents for liquid formulations, fabric softeners, static control agents, etc. Dye transfer inhibiting agents, including polyamine N-oxides such as polyvinylpyridine N-oxide can be used. Dye-transfer-inhibiting agents are further illustrated by polyvinylpyrrolidone and copolymers of N-vinyl imidazole and N-vinyl pyrrolidone. If desired, soluble magnesium salts such as $MgCl_2$, $MgSO_4$, and the like, can be added at levels of, typically, 0.1%-2%, to enhance grease removal performance.

Various deterative ingredients employed in the present compositions optionally can be further stabilized by absorbing said ingredients onto a porous hydrophobic substrate, then coating said substrate with a hydrophobic coating. Preferably, the deterative ingredient is admixed with a surfactant before being absorbed into the porous

substrate. In use, the deterative ingredient is released from the substrate into the aqueous washing liquor, where it performs its intended deterative function.

To illustrate this technique in more detail, a porous hydrophobic silica (trademark SIPERNAT D10, DeGussa) is admixed with a proteolytic enzyme solution containing 3%-5% of C₁₃₋₁₅ ethoxylated alcohol (EO 7) nonionic surfactant. Typically, the enzyme/surfactant solution is 2.5 X the weight of silica. The resulting powder is dispersed with stirring in silicone oil (various silicone oil viscosities in the range of 500-12,500 can be used). The resulting silicone oil dispersion is emulsified or otherwise added to the final detergent matrix. By this means, ingredients such as the aforementioned enzymes, bleaches, bleach activators, bleach catalysts, photoactivators, dyes, fluorescers, fabric conditioners and hydrolyzable surfactants can be "protected" for use in detergent compositions.

An antioxidant can be optionally added to the detergent compositions of the present invention. They can be any conventional antioxidant used in detergent compositions, such as 2,6-di-tert-butyl-4-methylphenol (BHT), carbamate, ascorbate, thiosulfate, monoethanolamine(MEA), diethanolamine, triethanolamine, etc. It is preferred that the antioxidant, when present, be present in the composition from about 0.001% to about 25%, preferably from about 0.01% to about 10%, more preferably from about 0.05% to about 5%, by weight.

The compositions of this invention can be in any form, including liquid, tablet, paste, gel, microemulsion or tricritical composition. Highly preferred embodiments are in liquid or gel form. Liquid detergent compositions can contain water and other solvents as carriers. Low molecular weight primary or secondary alcohols exemplified by methanol, ethanol, propanol, and isopropanol are suitable. Monohydric alcohols are preferred for solubilizing surfactant, but polyols such as those containing from 2 to about 6 carbon atoms and from 2 to about 6 hydroxy groups (e.g., 1,3-propanediol, ethylene glycol, glycerine, and 1,2-propanediol) can also be used. The compositions may contain from 5% to 90%, typically 10% to 50% of such carriers.

An example of the procedure for making liquid compositions herein is as follows:

- To the free water and citrate are added and dissolved. To this solution amine oxide, betaine, ethanol, hydrotrope and nonionic surfactant are added. If free water isn't

available, the citrate are added to the above mix then stirred until dissolved. At this point, an acid is added to neutralize the formulation. It is preferred that the acid be chosen from organic acids such as maleic and citric, however, inorganic mineral acids may be employed as well. In preferred embodiments these acids are added to the formulation followed by diamine addition. AExS is added last.

Compositions of the invention will have a pH range of from about 2 to about 13, preferably, pH is alkaline, more preferably from about 7 to about 12.5, more preferably from about 8 to about 12, even more preferably from about 9 to about 11.5.

404430 28874

What is claimed is:

1. A hand held ultrasonic cleaning device comprising a housing, said housing comprising a gripping means; a cleaning head adapted to rest on and be moved over surface to be cleaned, wherein said cleaning head is adapted to be removably mounted to said housing and the minimum surface area of said cleaning head to rest on said surface is greater than 6.25 cm^2 ; a transducer means mounted in said housing for oscillating said cleaning head at an ultrasonic frequency; and a power supply means for supplying direct current to said transducer means, wherein said power supply means is associated with said device.
2. A device according to Claim 1 wherein said gripping means is at the proximal end of said housing and said cleaning head is at the distal end of said housing.
3. A device according to either Claims 1 or 2 wherein said power supply means is mounted in said housing.
4. A device according to any of Claims 1 to 3 wherein said power supply means is a rechargeable battery.
5. A device according to any of Claims 1 to 4 wherein said device further comprises at least one solution storage means associated with said device, and said solution storage means contains at least one cleaning composition suitable for cleaning said surface; and at least one dispensing means mounted in said housing for supplying said at least one cleaning composition from said at least one solution storage means to said surface prior to or at the same time as said surface is contacted by said cleaning head.
6. A device according to Claim 5 wherein said solution storage means is adapted to be removably mounted to said housing.

7. A device according to Claim 5 wherein said solution storage means is mounted in said housing.
8. A device according to any of Claims 1 to 7 wherein said device comprises at least two of said at least one solution storage means.
9. A device according to any of Claims 1 to 8 wherein said surface is a hard surface.
10. An ultrasonic cleaning device comprising a first housing, said first housing comprising a gripping means; a cleaning head adapted to rest on and be moved over surface to be cleaned, and said cleaning head is adapted to be removably mounted to said first housing and the minimum surface area of said cleaning head to rest on said surface is greater than 6.25 cm^2 ; a second housing, wherein said first housing is associated with said second housing and said second housing comprises a transducer means mounted in said second housing for oscillating said cleaning head at an ultrasonic frequency; and a power supply means for supplying direct current to said transducer means, wherein said power supply means is associated with said device.
11. A device according to Claim 10 wherein said gripping means is at the proximal end of said first housing and said cleaning head is at the distal end of said first housing.
12. A device according to any of Claims 10 to 11 wherein said power supply means is mounted in said second housing.
13. A device according to any of Claims 10 to 12 wherein said device further comprises at least one solution storage means associated with said device, and said at least one solution storage means contains at least one cleaning composition suitable for cleaning said surface; and at least one dispensing means mounted in said first housing for supplying said at least one cleaning composition from said at least one solution storage means to said surface prior to at the same time as said surface is contacted by said cleaning head.

14. A device according to any of Claims 10 to 13 wherein said solution storage means is adapted to be removably mounted to said second housing.
15. A device according to any of Claims 10 to 14 wherein said at least one solution storage means is adapted to be removably mounted to said first housing.
16. A device according to any of Claims 5 to 9 and 13 to 15 wherein said cleaning composition comprises a surfactant, said surfactant selected from the group consisting of, anionic surfactants, nonionic surfactants, cationic surfactants, zwitterionic surfactants, amphoteric surfactants and mixtures thereof.
17. A device according to any of Claims 5 to 9, and 13 to 16 wherein said cleaning composition further comprises a cleaning adjunct selected from the group consisting of is selected from the group consisting of builders, enzymes, bleach activators, bleach catalysts, bleach boosters, bleaches, alkalinity sources, colorants, perfume, lime soap dispersants, polymeric dye transfer inhibiting agents, crystal growth inhibitors, photobleaches, heavy metal ion sequestrants, anti-tarnishing agents, anti-microbial agents, anti-oxidants, anti-redeposition agents, soil release polymers, electrolytes, pH modifiers, thickeners, abrasives, metal ion salts, enzyme stabilizers, corrosion inhibitors, diamines, suds stabilizing polymers, solvents, process aids, antibacterial agent, perfume, fabric softening agents, optical brighteners, hydrotropes. and mixtures thereof.
18. A cleaning device according to any of Claims 5 to 9 and 13 to 17 wherein said cleaning composition is supplied to said surface coterminous with said cleaning head.
19. A cleaning device according to any of Claims 1 to 18 wherein said cleaning head is in the form of a sponge, scouring pad, or bristles.

20. A cleaning device according to any of Claims 1 to 19 wherein said transducer means has an average oscillating frequency of from 1000 Hz to 100 kHz.
21. A cleaning device according to any of Claims 1 to 20 wherein said device provides a power output per unit of surface area of said cleaning head of at least 0.02 watts/cm².
22. A cleaning device according to any of Claims 1 to 21 wherein said device is adapted to function while partially immersed in an aqueous environment.
23. A cleaning device according to any of Claims 1 to 22 wherein said device is adapted to function while totally immersed in an aqueous environment.
24. A method of removing tough food soil from a hard surface comprising the steps of:
- (i) contacting said soil with a cleaning composition;
 - (ii) contacting said soil with said cleaning head of said device according to any of Claims 1 to 23 and imparting ultrasonic energy to said soil.
25. A method of removing tough food soil according to claim 24 further comprising the step of:
- (iii) rinsing said hard surface with an aqueous solution.
26. An ultrasonic cleaning product comprising:
- (a) a cleaning composition comprising an cleaning agent; and
 - (b) a hand held ultrasonic cleaning device comprising a housing, said housing comprising a gripping means; a cleaning head adapted to rest on and be moved over surface to be cleaned, wherein said cleaning head is adapted to be removably mounted to said housing and the minimum surface area of said cleaning head to rest on said surface is greater than 6.25 cm²; a transducer means mounted in said housing for oscillating said cleaning head at an ultrasonic frequency; and a power supply means for supplying direct current

to said transducer means, wherein said power supply means is associated with said device.

27. An ultrasonic cleaning product comprising:

- (a) a cleaning composition comprising a cleaning agent; and
- (b) an ultrasonic cleaning device comprising a first housing, said first housing comprising a gripping means; a cleaning head adapted to rest on and be moved over surface to be cleaned, and said cleaning head is adapted to be removably mounted to said first housing and the minimum surface area of said cleaning head to rest on said surface is greater than about 6.25 cm^2 ; a second housing, wherein said first housing is associated with said second housing and said second housing comprises a transducer means mounted in said second housing for oscillating said cleaning head at an ultrasonic frequency; and a power supply means for supplying direct current to said transducer means, wherein said power supply means is associated with said device..

28. The ultrasonic cleaning product of either of claims 26 or 27 wherein said cleaning agent is selected from the group consisting of builders, surfactants, enzymes, bleach activators, bleach catalysts, bleach boosters, bleaches, alkalinity sources, colorants, perfume, lime soap dispersants, polymeric dye transfer inhibiting agents, crystal growth inhibitors, photobleaches, heavy metal ion sequestrants, anti-tarnishing agents, anti-microbial agents, antibacterial agent, anti-oxidants, anti-redeposition agents, soil release polymers, electrolytes, pH modifiers, thickeners, abrasives, metal ion salts, enzyme stabilizers, corrosion inhibitors, diamines, suds stabilizing polymers, solvents, process aids, perfumes, fabric softening agents, optical brighteners, hydrotropes. and mixtures thereof.

29. The ultrasonic cleaning product according to any of claims 26 to 28 further comprising instructions for using said product comprising the steps of:

- (i) applying an effective amount of said cleaning composition to said surface;
and
- (ii) imparting ultrasonic waves to said surface using said device;

30. The ultrasonic cleaning product according to any of claims 26 to 28 further comprising instructions for using said product comprising the steps of:

- (i) using said device to apply an effective amount of said cleaning composition to said surface concurrently and coterminous with said cleaning head; and
- (ii) moving said cleaning head over and maintain contact thereto said surface.

31. An ultrasonic cleaning device comprising a housing, said housing comprising a gripping means, a retaining means for removably retaining tableware; a transducer means mounted in said housing for oscillating said housing at an ultrasonic frequency; and a power supply means for supplying direct current to said transducer means, wherein said power supply means is associated with said device.

32. An ultrasonic cleaning device comprising a housing, said housing is adapted to be at least partially immersed in an aqueous environment, and said housing comprises a gripping means, a retaining means for removably retaining tableware; a transducer means mounted in said housing for oscillating said aqueous environment at an ultrasonic frequency; and a power supply means for supplying direct current to said transducer means, wherein said power supply means is associated with said device.

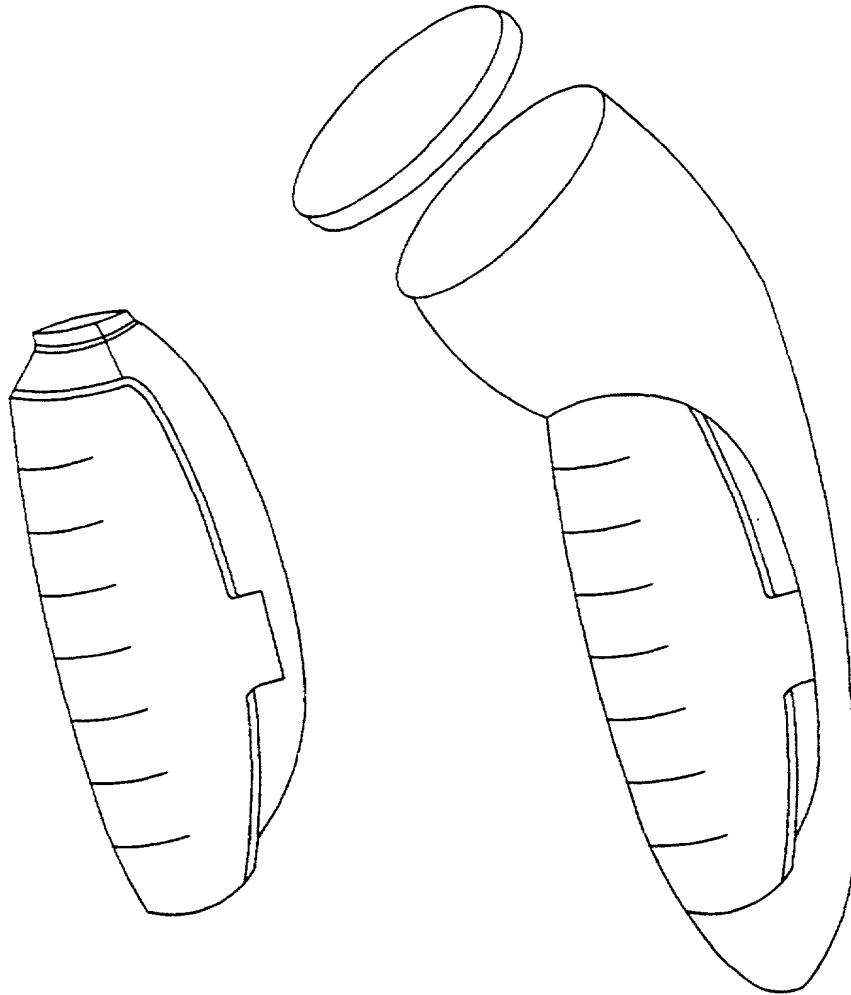


FIG. 1

2/4

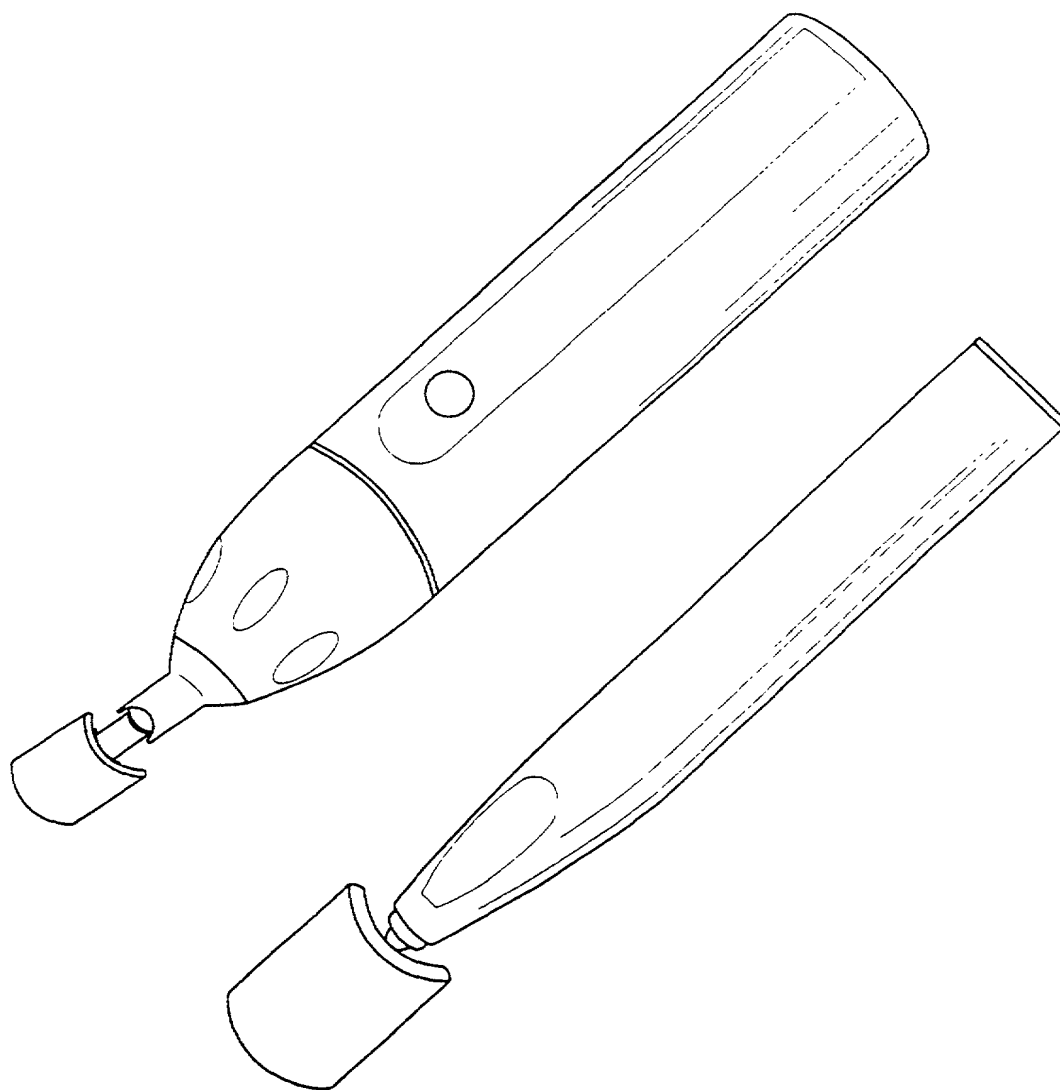


FIG. 2

3/4

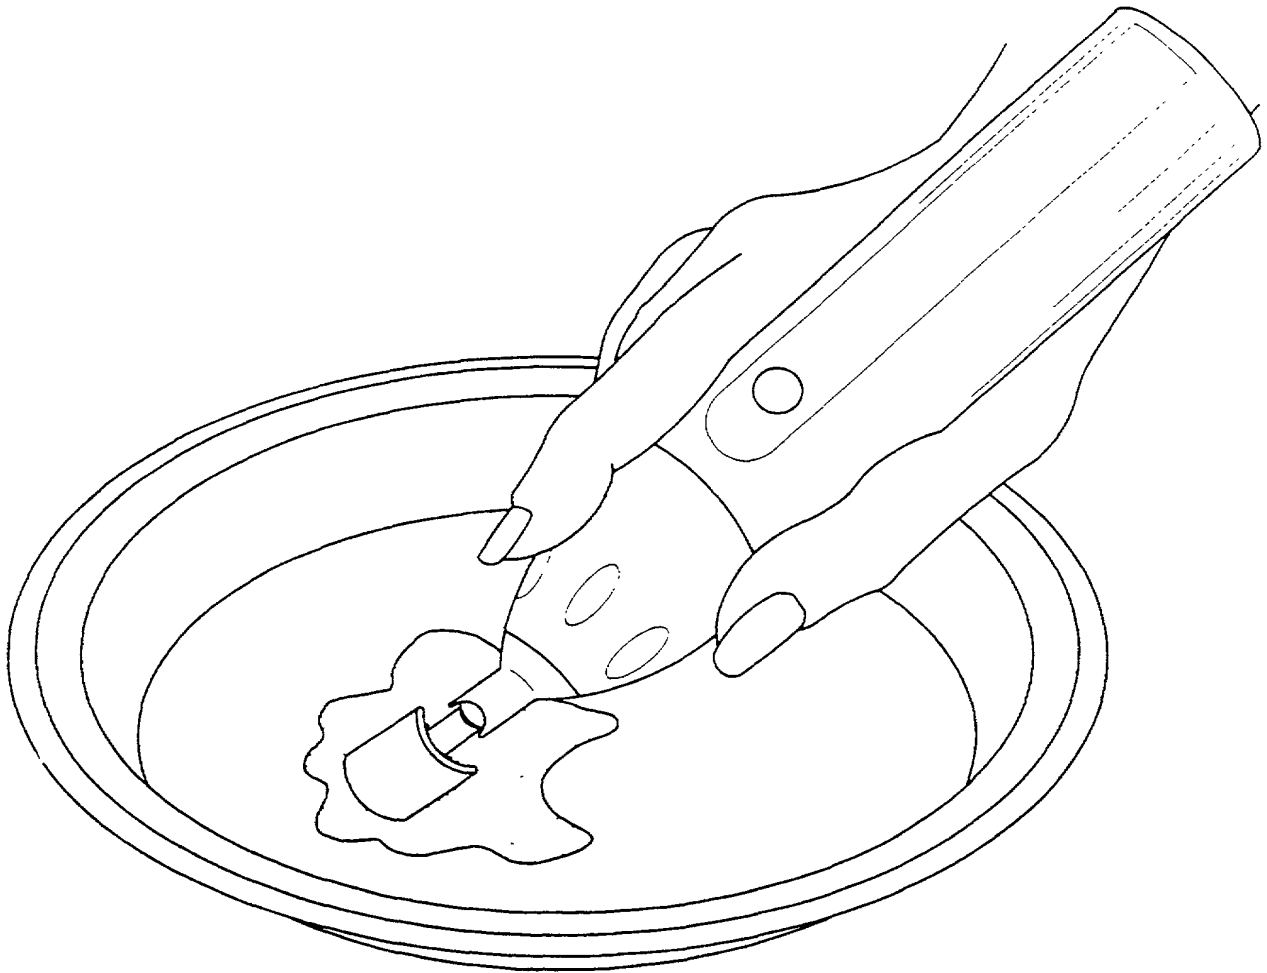


FIG. 3

4/4

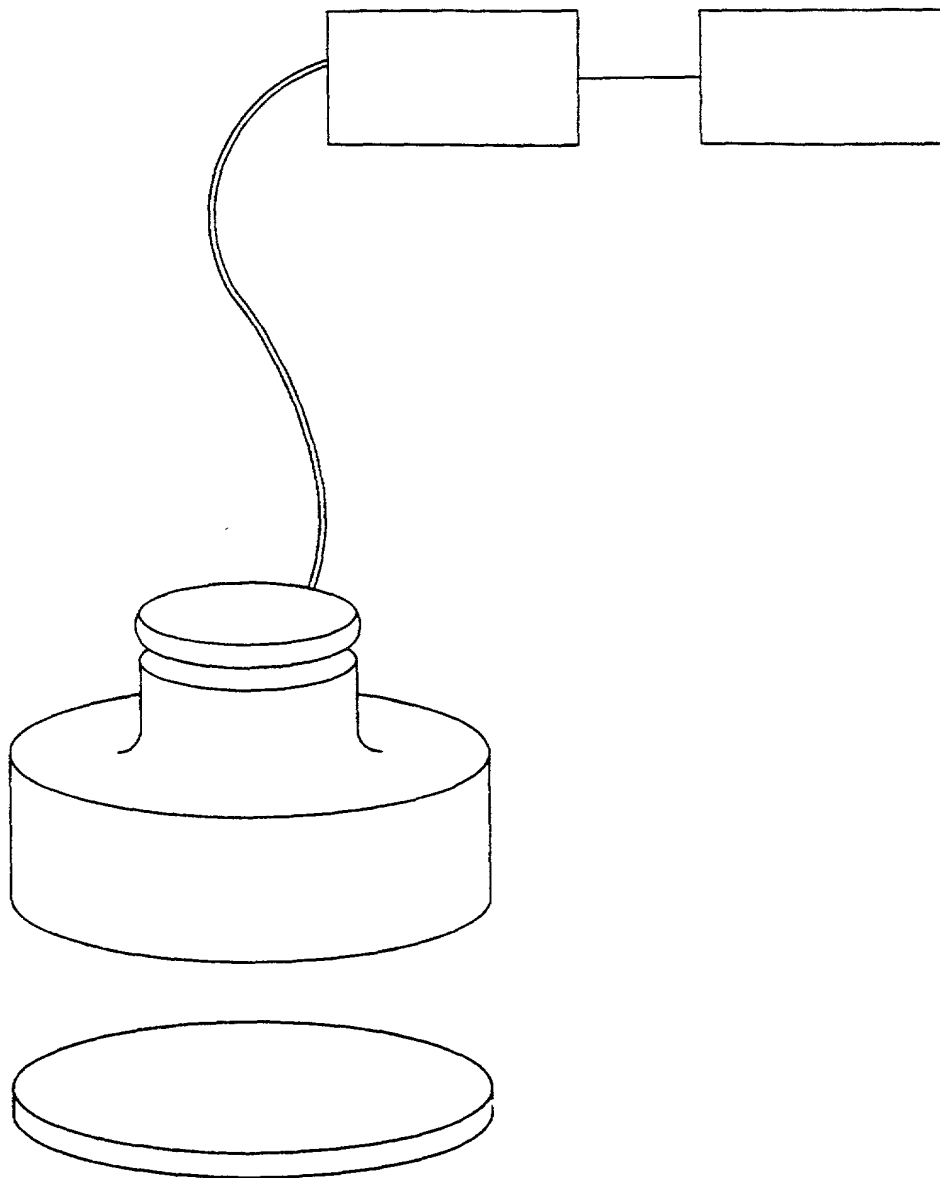


FIG. 4

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In the U.S. National Phase Entry
Under 35 USC 371 from
International Application of
MCKENZIE, Kristen Lynne et al.
Int'l. Application No. PCT/US99/27201
Filed in the RO/US on 16 November 1999
Entitled: *Ultrasonic Cleaning Device*

ASSOCIATE POWER OF ATTORNEY

Assistant Commissioner for Patents
Box PCT
Washington, D.C. 20231


Dear Sir:

You are requested to recognize K. W. Zerby (Registration No. 32,323), B. M. Bolam (Registration No. 37,513), F. C. Turner (Registration No. 39,863), C. B. Cook (Registration No. 39,151), M. Dressman (Registration No. 42,498), and R. S. Echler, Sr. (Registration No. 41,006) of The Procter & Gamble Company, Cincinnati, Ohio, as Associate Attorneys to prosecute this application, to make alterations and amendments therein, and to transact all business in the Patent Office connected with the application or with the patent granted thereupon.

Please address all future communications to:

J. Taffy, Attorney
Customer Number 27748

Respectfully submitted for Applicants,

By 
T. David Reed
Agent for Applicant
Registration No. 32,931

Cincinnati, Ohio
14 May 2001
(513) 627-7025/FAX 627-6333

RECEIVED
MAY 15 2001
FBI - CINCINNATI

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **Ultrasonic Cleaning Device** the specification of which

(check ☐ is attached hereto.
one) ☒ was filed on November 16, 1999 as United States Application No. or
PCT International Application Serial No. PCT/US99/27201
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations §1.56.

I hereby claim foreign priority benefits under Title 35 United States Code §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)Priority Claimed

(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
----------	-----------	------------------------	------------------------------	-----------------------------

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

60/108,629

11/16/98

Application Serial No.

Filing Date

Application Serial No.

Filing Date

I hereby claim the benefit under Title 35 United States Code §120 of any United States application(s), or §365(c) of any PCT International application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35 United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

U.S. Parent Application Number	PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (If applicable)

As named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Name	Reg. No.	Associate Power of Attorney Attached
Ian S. Robinson	43,348	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Pankaj M. Khosla	37,978	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Richard S. Echler, Sr.	41,006	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Kim William Zerby	32,323	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Dara M. Kendall	43,709	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Loretta J. Henderson	37,347	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Bart S. Hersko	32,572	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
T. David Reed	32,931	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Timothy B. Guffey	41,048	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

SEND CORRESPONDENCE TO:

Ian S. Robinson

The Procter & Gamble Company

(513) 627-0258

Name

Phone No.

Miami Valley Laboratories, P.O. Box 538707, Cincinnati, Ohio 45253-8707

Street

City

State

Zip Code

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

100
Full name of sole or first joint inventor Kristen Lynne McKenzie

Inventor's signature Kristen Lynne McKenzie

12/28/99
Date

Residence 5365 Harvestdale Drive, Mason, OH 45040 OH

Citizenship US

Post Office Address The Procter & Gamble Company, Miami Valley Laboratories

P. O. Box 538707, Cincinnati, OH 45253-8707

200
Full name of second joint inventor, if any William Michael Schepers

Inventor's signature William Michael Schepers

12/14/99
Date

Residence 2393 Picnic Woods Drive, Lawrenceburg, IN 47025 IN

Citizenship US

Post Office Address The Procter & Gamble Company, Miami Valley Laboratories

P. O. Box 538707, Cincinnati, OH 45253-8707

300
Full name of third joint inventor, if any Christiaan Arthur Jacques Kamiel Thoen

Inventor's signature Christiaan Arthur Jacques Kamiel Thoen

Date 12/15/99

Residence 8485 Rupp Farm Drive, West Chester, OH 45069 OH

Citizenship Belgium

Post Office Address The Procter & Gamble Company, Miami Valley Laboratories

P. O. Box 538707, Cincinnati, OH 45253-8707

400
Full name of fourth joint inventor, if any Chandrika (NMN) Kasturi

Inventor's signature Chandrika Kasturi

12/20/99
Date

Residence 10444 Cliffwood Court, Cincinnati, OH 45241 OH

Citizenship US

Post Office Address The Procter & Gamble Company, Miami Valley Laboratories

P. O. Box 538707, Cincinnati, OH 45253-8707